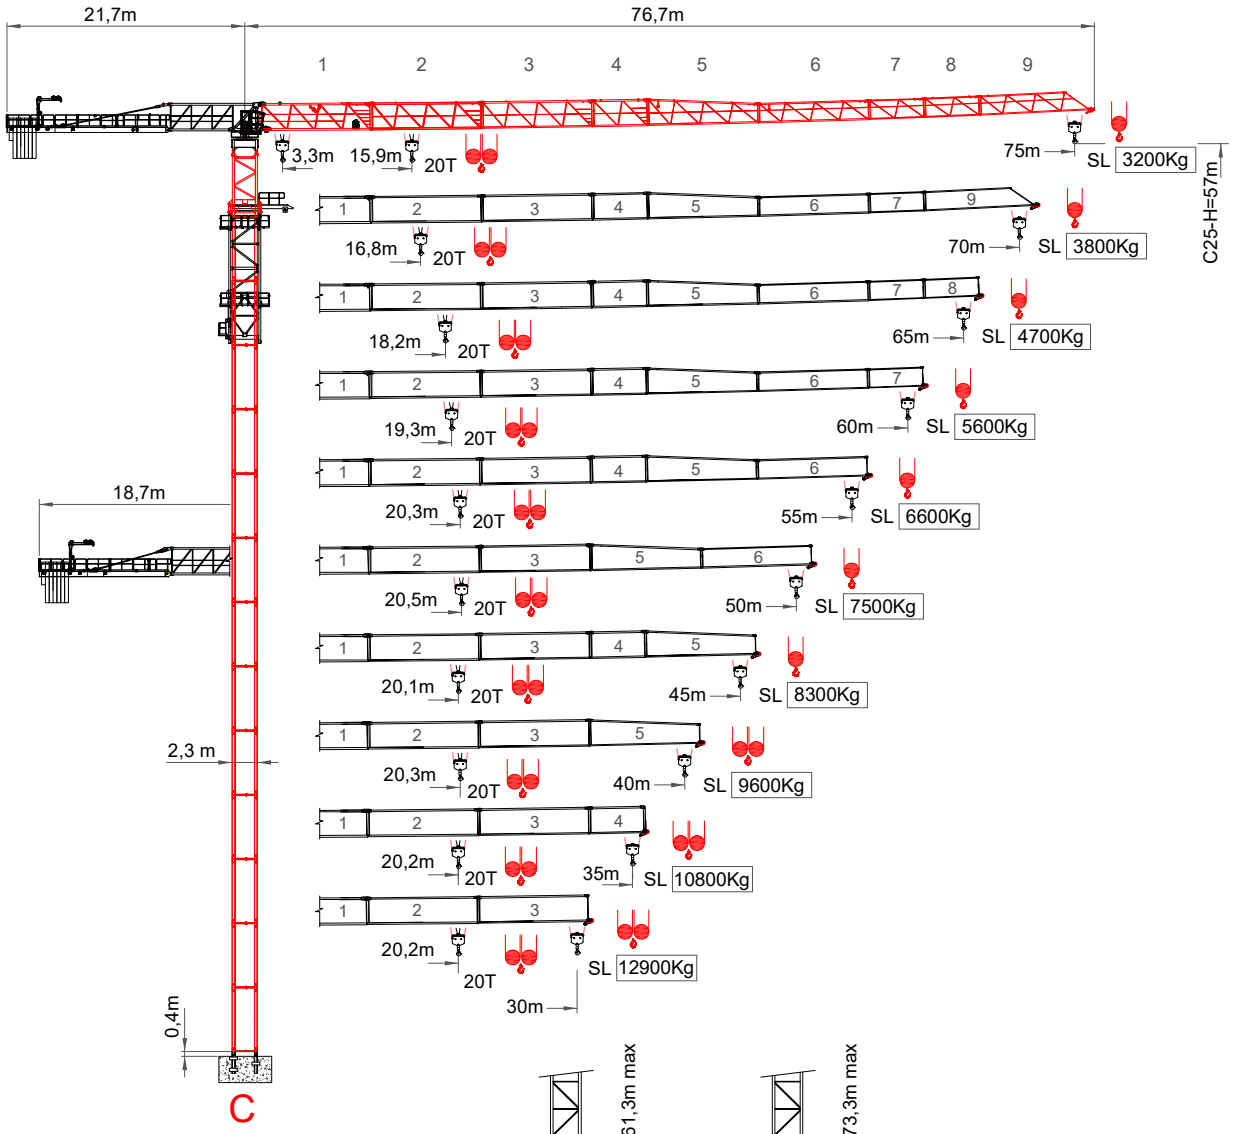
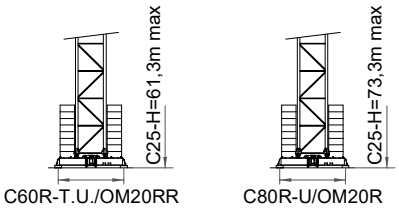
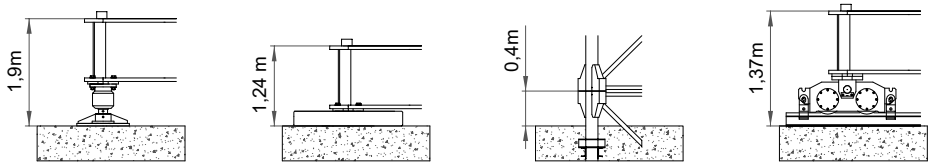
SÁEZ cranes

STC 7532 16T / 20T







ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - советоваться

CE

LLOYD'S REGISTER LRQA ISO 9001

SAEZ i+D+I | S-LINK S.D.S. | EKO+ POWER CONTROL | REMOTE ASSISTANCE 24 | ZONING | ANTICOLLISION | OPERATOR ACCESS

EN 14439 - FEM 1005 C25

STC 7532 20T
R00_10/26

SÁEZ cranes STC 7532 20T

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - - График грузоподъёмности

75 m

SL	15	20	25	30,2	35	40	45	50	55	60	65	70	75	m
	10000	10000	10000	10000	8500	7200	6300	5500	4900	4400	3900	3500	3200	Kg
	15	20	28,1	30	35	40	45	50	55	60	65	70	75	m
	10000	10000	10000	9245	7700	6555	5670	4970	4395	3920	3520	3175	2880	Kg
	14,4	20	25	30	35	40	45	50	55	60	65	70	75	m
	20000	13725	10595	8550	7110	6040	5215	4560	4025	3580	3205	2885	2610	Kg
SL	15,9	20	25	30	35	40	45	50	55	60	65	70	75	m
	20000	16600	12100	9800	8200	6900	6000	5200	4600	4100	3600	3200	2900	Kg

70 m

SL	15	20	25	31,9	35	40	45	50	55	60	65	70	m
	10000	10000	10000	10000	9000	7700	6700	5900	5200	4700	4200	3800	Kg
	15	20	29,6	30	35	40	45	50	55	60	65	70	m
	10000	10000	10000	9825	8195	6990	6055	5310	4705	4205	3780	3420	Kg
	15,3	20	25	30	35	40	45	50	55	60	65	70	m
	20000	14690	11360	9180	7650	6510	5630	4930	4360	3890	3490	3150	Kg
SL	16,8	20	25	30	35	40	45	50	55	60	65	70	m
	20000	17200	12900	10400	8700	7400	6400	5600	4900	4400	3900	3500	Kg

65 m

SL	15	20	25	34,8	35	40	45	50	55	60	65	m
	10000	10000	10000	10000	9900	8500	7400	6500	5800	5200	4700	Kg
	15	20	25	32,1	35	40	45	50	55	60	65	m
	10000	10000	10000	10000	9040	7725	6705	5900	5240	4690	4230	Kg
	16,7	20	25	30	35	40	45	50	55	60	65	m
	20000	16280	12615	10220	8535	7280	6315	5545	4920	4400	3960	Kg
SL	18,2	20	25	30	35	40	45	50	55	60	65	m
	20000	18400	14200	11500	9600	8200	7100	6200	5500	4900	4400	Kg

60 m

SL	15	20	25	30	36,8	40	45	50	55	60	m
	10000	10000	10000	10000	10000	9100	7900	7000	6200	5600	Kg
	15	20	25	30	33,9	40	45	50	55	60	m
	10000	10000	10000	10000	10000	8250	7175	6320	5620	5040	Kg
	17,7	20	25	30	35	40	45	50	55	60	m
	20000	17430	13530	10980	9180	7845	6810	5990	5325	4770	Kg
SL	19,3	20	25	30	35	40	45	50	55	60	m
	20000	19400	15100	12300	10300	8800	7600	6700	5900	5300	Kg

55 m

SL	15	20	25	30	38,7	40	45	50	55	m
	10000	10000	10000	10000	10000	9600	8300	7400	6600	Kg
	15	20	25	30	35,5	40	45	50	55	m
	10000	10000	10000	10000	10000	8695	7570	6670	5940	Kg
	18,6	20	25	30	35	40	45	50	55	m
	20000	18425	14310	11625	9730	8320	7235	6375	5670	Kg
SL	15	20,3	25	30	35	40	45	50	55	m
	20000	20000	15900	13000	10900	9300	8000	7100	6300	Kg

50 m

SL	15	20	25	30	39,1	40	45	50	m
	10000	10000	10000	10000	10000	9700	8500	7500	Kg
	15	20	25	30	35,8	40	45	50	m
	10000	10000	10000	10000	10000	8795	7655	6750	Kg
	18,9	20	25	30	35	40	45	50	m
	20000	18700	14530	11805	9885	8455	7355	6480	Kg
SL	15	20,5	25	30	35	40	45	50	m
	20000	20000	16100	13100	11000	9400	8200	7200	Kg

45 m

SL	15	20	25	30	38,2	40	45	m
	10000	10000	10000	10000	10000	9500	8300	Kg
	15	20	25	30	35,1	40	45	m
	10000	10000	10000	10000	10000	8585	7470	Kg
	18,5	20	25	30	35	40	45	m
	20000	18340	14245	11565	9680	8280	7200	Kg
SL	15	20,1	25	30	35	40	45	m
	20000	20000	15800	12900	10800	9200	8000	Kg

40 m

SL	15	20	25	30	38,6	40	m
	10000	10000	10000	10000	10000	9600	Kg
	15	20	25	30	35,3	40	m
	10000	10000	10000	10000	10000	8640	Kg
	18,7	20	25	30	35	40	m
	20000	18525	14390	11685	9785	8370	Kg
SL	15	20,3	25	30	35	40	m
	20000	20000	15900	13000	10900	9300	Kg

35 m

SL	15	20	25	30	35	m
	10000	10000	10000	10000	10000	Kg
	15	20	25	30	35	m
	10000	10000	10000	10000	10000	Kg
	18,6	20	25	30	35	m
	20000	18410	14300	11615	9720	Kg
SL	15	20,2	25	30	35	m
	20000	20000	15800	12900	10800	Kg

30 m

SL	15	20	25	30	m
	10000	10000	10000	10000	Kg
	15	20	25	30	m
	10000	10000	10000	10000	Kg
	18,6	20	25	30	m
	20000	18405	14295	11610	Kg
SL	15	20,2	25	30	m
	20000	20000	15800	12900	Kg

SL-SUPERLIFT Otras velocidades y características de funcionamiento - Variant speeds and service conditions - Abweichende Geschwindigkeiten und Betriebsbedingungen - Vitesses et conditions de fonctionnement différentes - Differenti velocità e condizioni di funzionamento - Нестандартные скорости и условия эксплуатации

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - - График грузоподъёмности

75 m

SL	15	20	25	30	36,7	40	45	50	55	60	65	70	75	m
	8000	8000	8000	8000	8000	7200	6300	5500	4900	4400	3900	3500	3200	Kg
	15	20	25	33,9	35	40	45	50	55	60	65	70	75	m
	8000	8000	8000	8000	7700	6555	5670	4970	4395	3920	3520	3175	2880	Kg
	17,5	20	25	30	35	40	45	50	55	60	65	70	75	m
	16000	13725	10595	8550	7110	6040	5215	4560	4025	3580	3205	2885	2610	Kg
SL	19,5	20	25	30	35	40	45	50	55	60	65	70	75	m
	16000	15600	12100	9800	8200	6900	6000	5200	4600	4100	3600	3200	2900	Kg

70 m

SL	15	20	25	30	38,7	40	45	50	55	60	65	70	m
	8000	8000	8000	8000	8000	7700	6700	5900	5200	4700	4200	3800	Kg
	15	20	25	30	35,7	40	45	50	55	60	65	70	m
	8000	8000	8000	8000	8000	6990	6055	5310	4705	4205	3780	3420	Kg
	18,6	20	25	30	35	40	45	50	55	60	65	70	m
	16000	14690	11360	9180	7650	6510	5630	4930	4360	3890	3490	3150	Kg
SL	15	21,4	25	30	35	40	45	50	55	60	65	70	m
	16000	16000	12900	10400	8700	7400	6400	5600	4900	4400	3900	3500	Kg

65 m

SL	15	20	25	30	35	42	45	50	55	60	65	m
	8000	8000	8000	8000	8000	8000	7400	6500	5800	5200	4700	Kg
	15	20	25	30	38,8	40	45	50	55	60	65	m
	8000	8000	8000	8000	8000	7725	6705	5900	5240	4690	4230	Kg
	15	20,3	25	30	35	40	45	50	55	60	65	m
	16000	16000	12615	10220	8535	7280	6315	5545	4920	4400	3960	Kg
SL	15	22,5	25	30	35	40	45	50	55	60	65	m
	16000	16000	14200	11500	9600	8200	7100	6200	5500	4900	4400	Kg

60 m

SL	15	20	25	30	35	44,6	45	50	55	60	m
	8000	8000	8000	8000	8000	8000	7900	7000	6200	5600	Kg
	15	20	25	30	35	41,1	45	50	55	60	m
	8000	8000	8000	8000	8000	8000	7175	6320	5620	5040	Kg
	15	21,6	25	30	35	40	45	50	55	60	m
	16000	16000	13530	10980	9180	7845	6810	5990	5325	4770	Kg
SL	15	23,7	25	30	35	40	45	50	55	60	m
	16000	16000	15100	12300	10300	8800	7600	6700	5900	5300	Kg

55 m

SL	15	20	25	30	35	40	46,8	50	55	m
	8000	8000	8000	8000	8000	8000	8000	7400	6600	Kg
	15	20	25	30	35	42,9	45	50	55	m
	8000	8000	8000	8000	8000	8000	7570	6670	5940	Kg
	15	22,7	25	30	35	40	45	50	55	m
	16000	16000	14310	11625	9730	8320	7235	6375	5670	Kg
SL	15	24,8	25	30	35	40	45	50	55	m
	16000	16000	15900	13000	10900	9300	8000	7100	6300	Kg

50 m

SL	15	20	25	30	35	40	47,3	50	m	15
	8000	8000	8000	8000	8000	8000	8000	7500	Kg	
	15	20	25	30	35	43,4	45	50	m	
	8000	8000	8000	8000	8000	8000	7655	6750	Kg	
	15	23,0	25	30	35	40	45	50	m	
	16000	16000	14530	11805	9885	8455	7355	6480	Kg	
SL	15	20	25,1	30	35	40	45	50	m	
	16000	16000	16000	13100	11000	9400	8200	7200	Kg	

45 m

SL	15	20	25	30	35	40	45	m
	8000	8000	8000	8000	8000	8000	8000	Kg
	15	20	25	30	35	42,6	45	m
	8000	8000	8000	8000	8000	8000	7500	Kg
	15	22,6	25	30	35	40	45	m
	16000	16000	14245	11570	9680	8280	7200	Kg
SL	15	24,6	25	30	35	40	45	m
	16000	16000	15800	12900	10800	9200	8000	Kg

35 m

SL	15	20	25	30	35	m
	8000	8000	8000	8000	8000	Kg
	15	20	25	30	35	m
	8000	8000	8000	8000	8000	Kg
	15	22,6	25	30	35	m
	16000	16000	14300	11615	9720	Kg
SL	15	24,7	25	30	35	m
	16000	16000	15800	12900	10800	Kg

40 m

SL	15	20	25	30	35	40	m
	8000	8000	8000	8000	8000	8000	Kg
	15	20	25	30	35	40	m
	8000	8000	8000	8000	8000	8000	Kg
	15	22,8	25	30	35	40	m
	16000	16000	14390	11690	9785	8370	Kg
SL	15	24,8	25	30	35	40	m
	16000	16000	15900	13000	10900	9300	Kg

30 m

SL	15	20	25	30	m
	8000	8000	8000	8000	Kg
	15	20	25	30	m
	8000	8000	8000	8000	Kg
	15	22,6	25	30	m
	16000	16000	14295	11610	Kg
SL	15	24,7	25	30	m
	16000	16000	15800	12900	Kg

SL-SUPERLIFT Otras velocidades y características de funcionamiento - Variant speeds and service conditions - Abweichende Geschwindigkeiten und Betriebsbedingungen - Vitesses et conditions de fonctionnement différentes - Differenti velocità e condizioni di funzionamento - Нестандартные скорости и условия эксплуатации

SÁEZ cranes STC 7532 16T / 20T

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

STC 7532 20T

75Hp (55kW)-INV-5V
400V-50/60HZ
HUH 140m S/R Ø20
*HUH 240m S/R Ø20 D-Max

		m/min	0 – 15	0 – 30	0 – 35	0 – 64	0 – 140	0 – 7,5	0 – 15	0 – 17,5	0 – 32	0 – 70
	280m	Kg	10000	10000	8000	4000	1000	20000	20000	16000	8000	2000
		kW	55	55	55	55	55	55	55	55	55	55

	m/min	0 / 85		
	kW	7,5		
	r.p.m.	0,3	0,6	0,7
	kW	3 x 7,5		
	m/min	0 / 24		
	kW	2 x 5,2		

STC 7532 16T

102Hp (75kW)-INV-5V
400V/480V- 50/60HZ
HUH 125m D/R Ø20
HUH 250m S/R Ø20

		m/min	0 – 15	0 – 44	0 – 80	0 – 100		0 – 7,5	0 – 22	0 – 40	0 – 50	
	550 m	Kg	8000	8000	4000	2300		16000	16000	8000	4500	
		kW	75	75	75	75		75	75	75	75	

	m/min	10 / 40 / 100		
	kW	7,5 / 11		
	r.p.m.	0,3	0,6	0,9
	kW	3 x 7,5		
	m/min	12 / 24 - 30		
	kW	4 x 5,5 kW		

* Opcional / Optional / Opzionale
Elevación / Hoisting / Heben / Levage / Sollevamento
Distribución / Trolleying / Katzfahren / Distribution / Ditribuzione
Orientación / Slewing / Schwenken / Orientation / Rotazione
Traslacion / Travelling / Schienenfahren / Translation / Traslazione
Cable / Rope / Seil / Câble / Fune

75Hp (55kW) - INV

2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 187A Fuse = 224A	TOTAL POWER 109 KVA	GENERATOR 200 KVA	100m 4x50mm2	150m 4x70mm2	200m 4x120mm2
		*480V 60Hz Imax.= 175A Fuse = 175A					

102Hp (75kW) - INV


2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 260A Fuse = 300A	TOTAL POWER 134 KVA	GENERATOR 280 KVA	100m 4x70mm2	150m 4x95mm2	200m 4x120mm2
		*480V 60Hz Imax.= 192A Fuse = 250A					

Green power ⓘ
IND. 5.0 ⓘ

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage

Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни

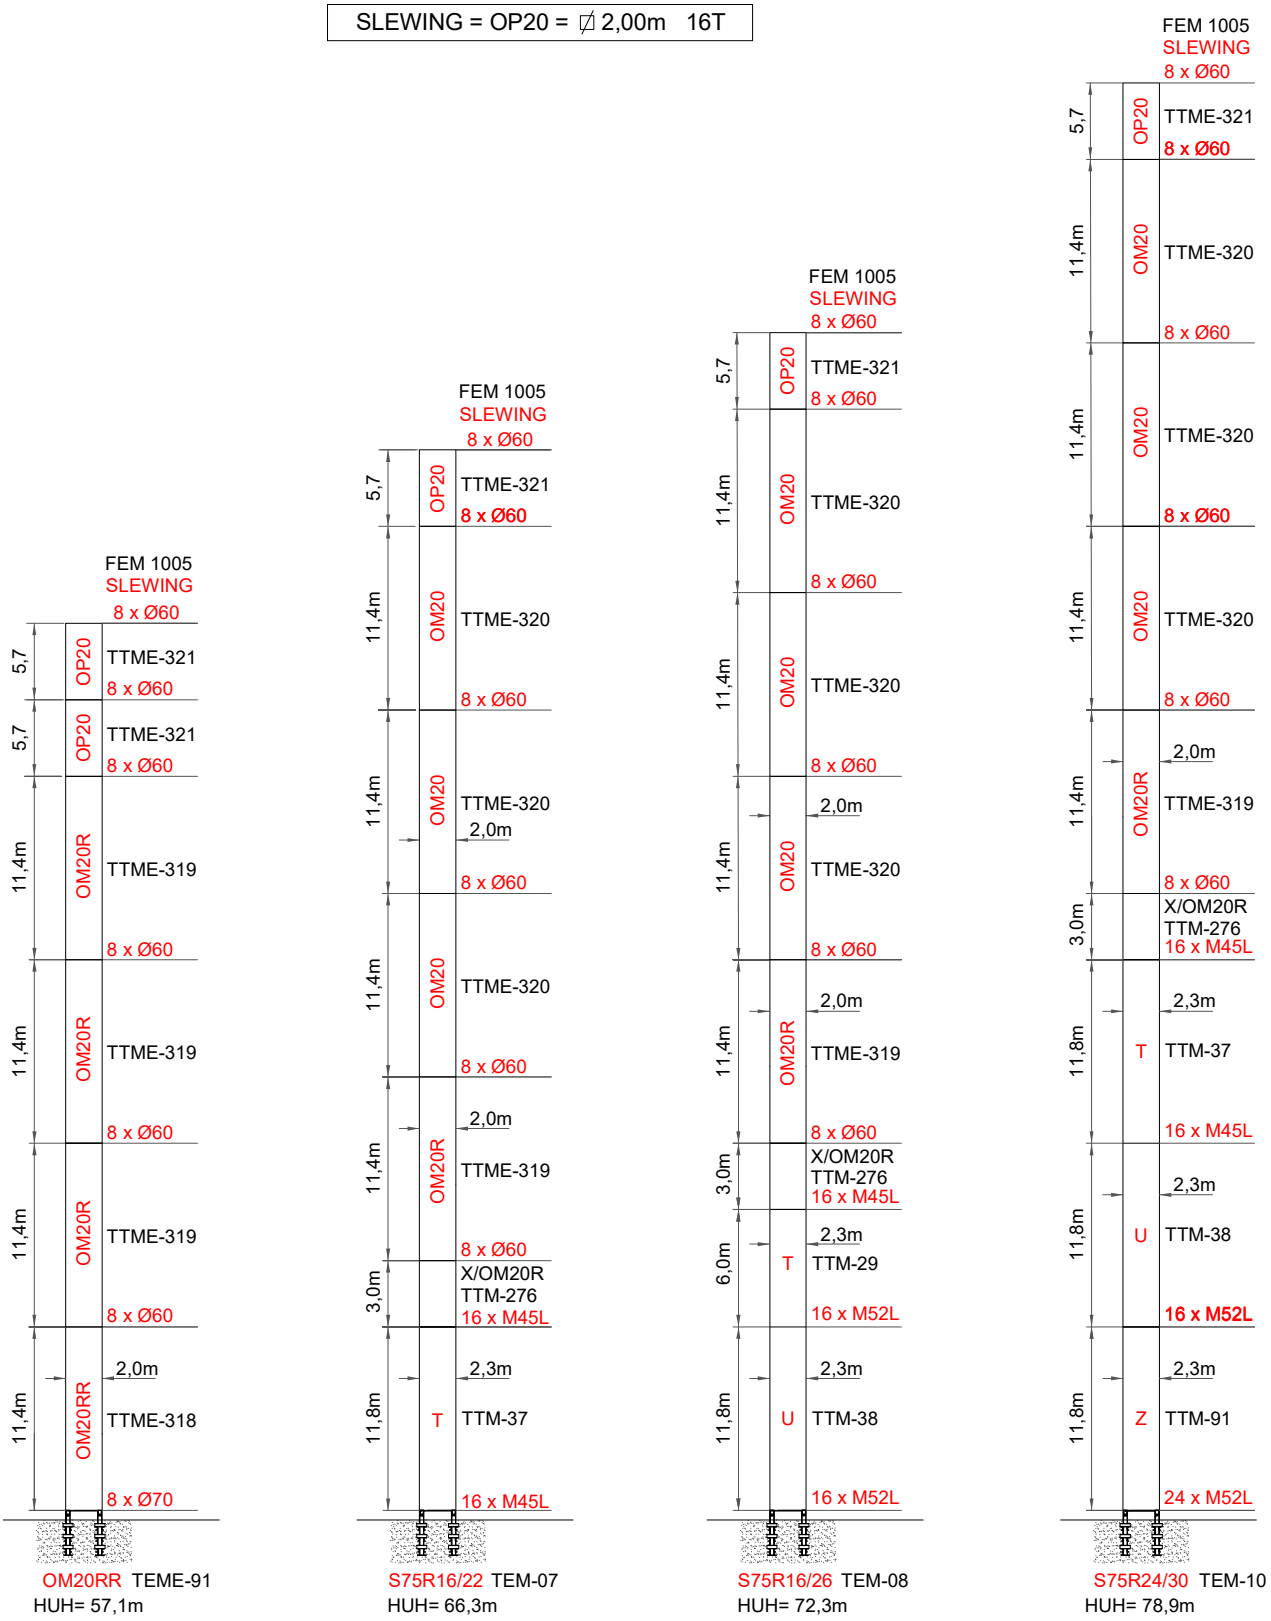
SLEWING = OP20 = ⍁ 2,00m 16T




SÁEZ cranes STC 7532 20T


Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни


C25 / D25



SLEWING = T = ⍁ 2,30m 20T

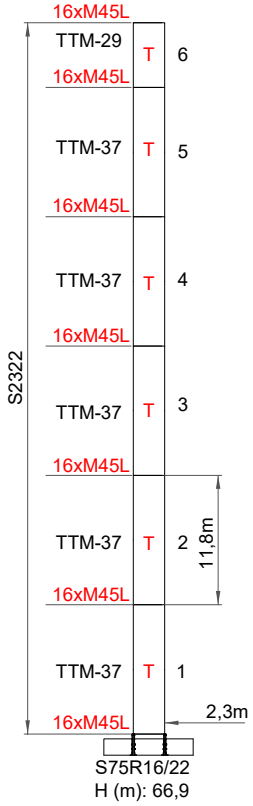

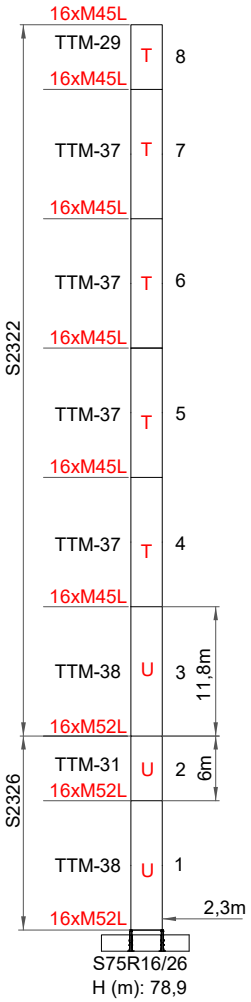

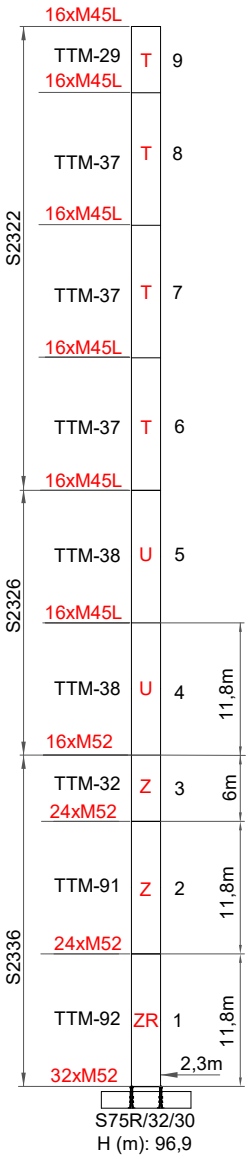


								U		ZZR
C25	H (m)	24,9	30,9	42,9	54,9	60,9	66,9	72,9	78,9	96,9
	M (T·m)	385,5	438,4	568	735,6	836,9	1011,4	1195,5	1427,5	2227,9
	T (t)	7,5	8,4	10,3	12,4	13,3	22,7	25	27	34,1
	P (t)	91,7	97,2	108,2	124,5	130	126,2	134	139	162,1
	R_1(t)	110	126,9	166,8	222,3	256,1	317,2	378,8	457,6	728
	R_2(t)	-155,9	-175,5	-222,9	-284,8	-321,1	-380,4	-445,8	-527,1	-809


							U		ZZR	
D25	H (m)	24,9	30,9	42,9	54,9	60,9	-	-	84,9	-
	M (T·m)	361,7	411	532,5	804,3	1010	-	-	2209	-
	T (t)	7	8	9,9	23,8	26,1	-	-	38,8	-
	P (t)	89	94,5	1005,5	113,7	118,7	-	-	150,5	-
	R_1(t)	102,5	118,1	157,2	248,9	318,7	-	-	724,3	-
	R_2(t)	-147	-165,4	-210	-305,9	-378,1	-	-	-799,3	-


Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни


C25 - Y



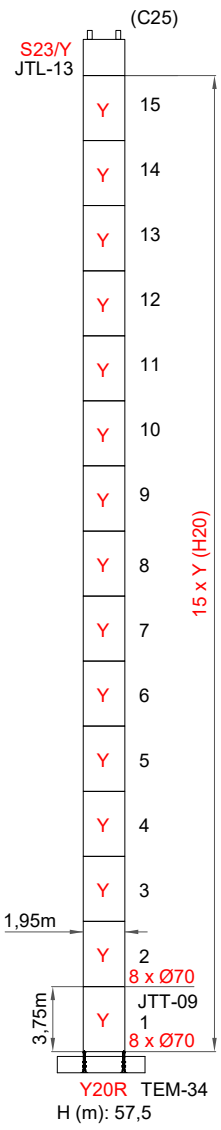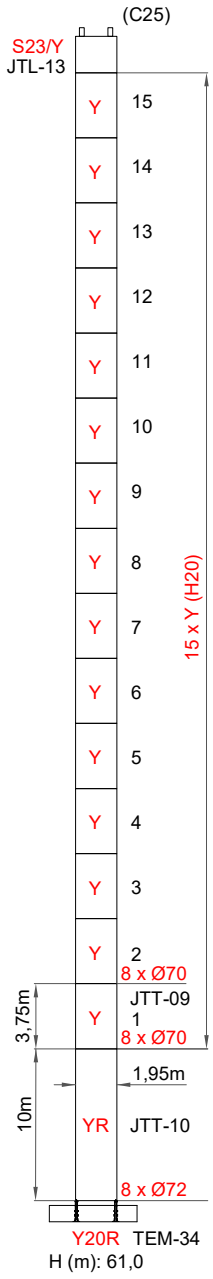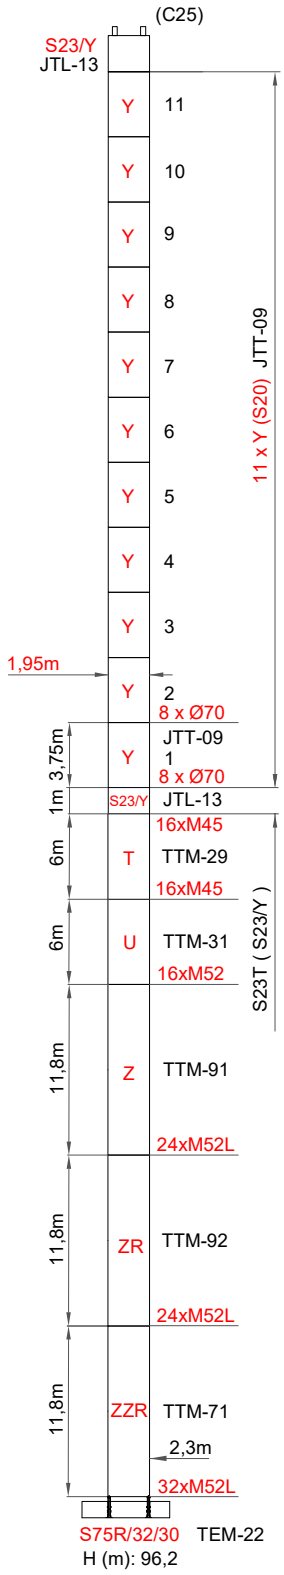Y = S20 8/8 Ø70
YR = S20R 8/8 Ø72/Ø70
= 16T








C25	H (m)	57,5	61,0	96,2
	M (T·m)	736,8	841,8	2024
	T (t)	11,3	12,1	31,2
	P (t)	111,4	116,1	162,3
	R_1 (t)	268,1	309,1	657,5
	R_2 (t)	-323,8	-367,2	-738,7

SÁEZ cranes STC 7532 16T / 20T

Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavora alla base - Балласты опорной рамы

(A/B)




C60R/OM20RR

75m

H (m)	58,0 m

ⓘ

(A/B)




C60R-T.U./OM20RR

75m

C25	H (m)	60,0 m
	R1 (t)	202 t
	Z (t)	176 t

(B)




C80R-U

75m

C25	H (m)	73,3 m
	R1 (t)	226,8 t
	Z (t)	150 t

(B)




C80ZRB

75m

C25	H (m)	83,0 m
	R1 (t)	256 t
	Z (t)	200 t

(B)




C100ZRRB

75m

C25	H (m)	90,0 m
	R1 (t)	227 t
	Z (t)	180 t

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage


Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavora alla base - Балласты опорной рамы



C60R-U

(m)	max. H(m) FEM 1005 C25	Z (t) FEM 1005 C25	R1 (t) FEM 1005 C25	T(12)	T(6)	T(3)
40	64,3	192	202	2	6	1
45	64,3	192	203,6	2	6	1
50	64,3	192	206,6	2	6	1
55	61,3	176	194	2	6	-
60	61,3	176	195,2	2	6	-
65	61,3	176	193,3	2	6	-
70	61,3	176	193,4	2	6	-
75	61,3	176	202,1	2	6	-


(m)	max. H(m) FEM 1005 D25	Z (t) FEM 1005 D25	R1 (t) FEM 1005 D25	T(12)	T(6)	T(3)
40	55,3	192	187,2	2	5	-
45	55,3	192	191,6	2	5	-
50	55,3	192	194,6	2	5	-
55	55,3	192	199,5	2	5	-
60	52,3	176	179,7	2	4	1
65	52,3	176	185,7	2	4	1
70	52,3	176	190,3	2	4	1
75	52,3	192	198,7	2	4	1



C80R-U


(m)	max. H(m) FEM 1005 C25	Z (t) FEM 1005 C25	R1 (t) FEM 1005 C25	U(12)	U(6)	T(12)	T(6)	T(3)
40	73,3	150	196,1	1	1	3	3	-
45	73,3	150	200	1	1	3	3	-
50	73,3	150	202,9	1	1	3	3	-
55	73,3	150	207,1	1	1	3	3	-
60	73,3	150	207	1	1	3	3	-
65	73,3	150	215,5	1	1	3	3	-
70	73,3	150	219,6	1	1	3	3	-
75	73,3	150	226,8	1	1	3	3	-

(m)	max. H(m) FEM 1005 D25	Z (t) FEM 1005 D25	R1 (t) FEM 1005 D25	U(12)	U(6)	T(12)	T(6)	T(3)
40	64,3	150	201,9	1	1	3	1	1
45	64,3	150	205,9	1	1	3	1	1
50	64,3	150	208,9	1	1	3	1	1
55	64,3	150	213,2	1	1	3	1	1
60	64,3	150	216,5	1	1	3	1	1
65	64,3	155	221,5	1	1	3	1	1
70	64,3	160	225,9	1	1	3	1	1
75	64,3	165	233,1	1	1	3	1	1



C80ZRB

C25	Jib	H (m)	83,0 m
	75m	R1 (t)	256 t
		Z (t)	200 t




C100ZRRB

C25	Jib	H (m)	90,0 m
	75m	R1 (t)	227 t
		Z (t)	180 t


SÁEZ cranes STC 7532 16T / 20T

Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

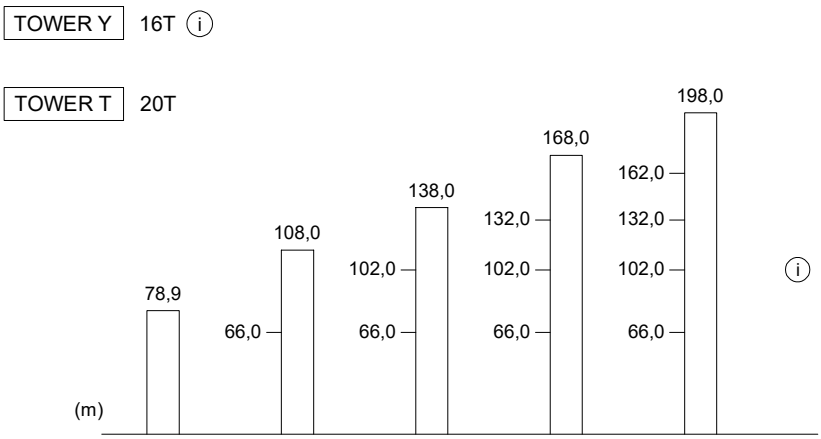TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN / GRUE ANDRÉE / GRU ANCORATA



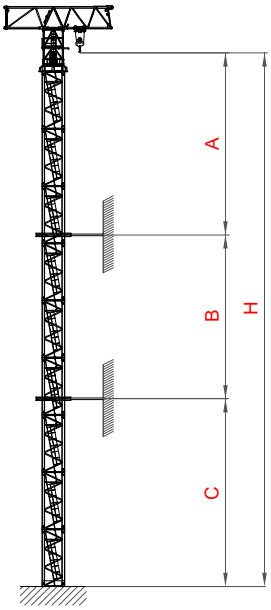TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN / GRUE ANDRÉE / GRU ANCORATA




A max. (m)	45
B min/max. (m)	24 / 42
C min/max. (m)	30 / 60
H max. (m)	i


i Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу

Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

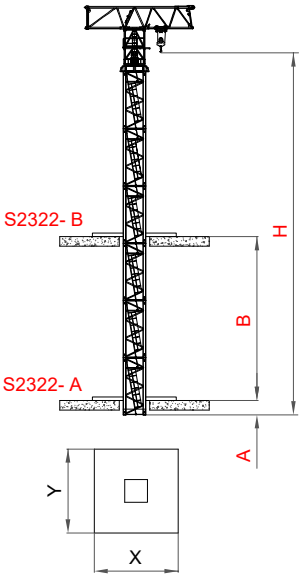TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERKRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES / GRU CLIMBING / ВНУТРЕННИЙ ПРОЦЕСС ТЕЛЕСКОПИРОВАНИЯ



	S 23 22			
A mix. (m)	2	2	2	2
B min. (m)	10	12	14	16
H max. (m)	36	44	50	54
X (m)	3			
Y (m)	2,5			

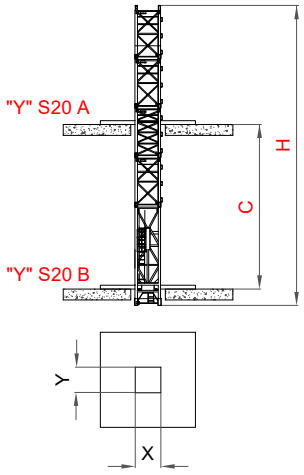

"Y" S20	= H20

	C (m)	H (m)
30/40m	10	42
	13	48
	16	54
45/55m	10	36
	13	42
	16	48
75m	10	30
	13	36
	16	42











X (m)	2,7
Y (m)	2,21

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу

SÁEZ cranes STC 7532 20T












Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transporte - dimensioni e trasporti - Размеры и транспорта

UPPER PART STC 7532 20T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
G75E-001	Counterjib 1		8,37	1,40	2,46	3770
	Counterjib 2		3,35	1,47	0,58	950
	Counterjib 3		11,90	1,53	0,69	3270
	Jib Trolley		1,87	2,16	0,91	465
	Hoist Block		1,15	0,30	2,23	500
	Jib 1		10,37	1,47	2,65	4860
	Jib 2		10,42	1,40	2,55	3130
	Jib 3		10,41	1,40	2,53	2410
	Jib 5		10,29	1,40	2,45	1500
	Jib 6		10,24	1,40	1,89	1190
	Jib end		0,81	1,40	0,55	120
	Slewing unit		2,65	2,56	2,24	8270
EQE7514R2-01 EQE7514R2-02	Hoist winch 75HP (55kW) INV 75HP (55kW) INV D-Max Ø20		2,60	1,90	1,11	2820




Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transporte - dimensioni e trasporti - Размеры и транспорта

UPPER PART STC 7532 16T






CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
G75E-001	Counterjib 1		8,37	1,40	2,46	3570
	Counterjib 2		3,35	1,47	0,58	950
	Counterjib 3		11,90	1,53	0,69	3070
	Jib Trolley		1,88	2,18	1,33	377
	Hoist Block		1,15	0,30	2,23	500
	Jib 1		10,37	1,47	2,65	4860
	Jib 2		10,42	1,40	2,55	3130
	Jib 3		10,41	1,40	2,53	2410
	Jib 5		10,29	1,40	2,45	1500
	Jib 6		10,24	1,40	1,89	1190
	Jib end		0,81	1,40	0,55	120
	Slewing unit		2,65	2,56	2,24	8270
EQEE7527-001 Electrical Pan. Excl.	Hoist winch 102HP(75kW) INV Ø20		2,70	1,82	1,42	2800
AGT-231	Electrical Panel 3745		2,30	1,60	1,80	770

SÁEZ cranes STC 7532 16T / 20T







UPPER PART STC 7532 16T / 20T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
AGT-235 AGT-209 AGT-171	Cabin EKO Cabin STANDARD Cabin DELUXE		2,60	1,45	2,11	1015
AGT-180	Cabin support		2,60	2,25	2,11	400
AGT-181	Slewing balcony		2,46	1,55	0,73	254


UPPER PART STC 7532 16T / 20T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
P75E-001	Jib 75,0m					
	Jib 4		5,34	1,40	2,49	1020
	Jib 7		5,23	1,40	1,86	510
	Jib 8		5,20	1,40	1,84	420
	Jib 9		10,15	1,40	1,81	660








AIR COUNTERWEIGHT STC 7532 16T / 20T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
LM0E-27 Unfilled Air Ballast Frame Kit	Air ballast type A		3,40	1,05	0,35	150
	Air ballast type B		2,83	1,05	0,35	130
	Air ballast type C		1,14	1,05	0,35	110
LM0E-28 Concrete Filled Air Ballast Frame Kit	Air ballast type A		3,40	1,05	0,35	3000
	Air ballast type B		2,83	1,05	0,35	2500
	Air ballast type C		1,14	1,05	0,35	1000

FOUNDATION ANCHOR



CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
TEM-07	S75R/16/22 M45	 L x W H	0,54	0,54	2,00	350 (x4)
TEM-08	S75R/16/26 M52	 L x W H	0,54	0,54	2,40	525 (x4)
TEM-10	S75R/24/30 M52	 L x W H	0,54	0,54	3,00	900 (x4)
TEM-22	S75R/32/30 M52	 L x W H	0,54	0,54	3,00	925 (x4)
TEM-20	DIMA Type T / U / Z	 H L x W	2,60	2,60	1,00	2500
TEME-93 (STC 7535 16T)	DIMA Type OM20RR	 H L x W	2,00	2,00	1,00	1500

TOWER SECTION STC 7532 16T / 20T








CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TTM-37 TTM-29 TTM-28	Type T (S23)	 H W L	11,80 6,00 3,00	2,27 2,27 2,27	2,29 2,29 2,29	9000 4780 2750
TTM-38 TTM-31 TTM-30	Type U (S23)	 H W L	11,80 6,00 3,00	2,31 2,31 2,31	2,34 2,34 2,34	11180 6200 3200
TTM-91 TTM-32	Type Z (S23)	 H W L	11,80 6,00	2,36 2,36	2,61 2,61	15064 7825
TTM-92 TTM-33	Type ZR (S23)	 H W L	11,80 6,00	2,36 2,36	2,61 2,61	15200 7925
TTM-71 TTM-41	Type ZZR (S23)	 H W L	11,80 6,00	2,36 2,36	2,61 2,61	15325 8200
TTM-77 TTM-42	Type ZRR (S23)	 H W L	11,80 6,00	2,36 2,36	2,61 2,61	15530 8405
TTM-112 TTM-151	Type ZRR-R (S23)	 H W L	11,80 6,00	2,36 2,36	2,61 2,61	18500 10250

SÁEZ cranes STC 7532 16T / 20T


TOWER SECTION STC 7532 16T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TTME-321	OP20 5,70M Ø60		5,90	2,05	2,00	3260
TTME-320	OM20 Ø60		11,40	2,00	2,00	5326
TTME-319	OM20R Ø60		11,40	2,00	2,00	7030
TTME-318	OM20RR Ø70/Ø60		11,40	2,00	2,00	9420
TTM-276	X/OM20R M45L/Ø60		3,00	2,27	2,00	4980





CROSSBASES

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BA0-17	C60R-U		9,01	1,94	1,35	13500
BA0-25	C60R-U/OM20RR		9,01	1,94	1,35	13500
BA0-18	C80R-U		11,80	1,94	1,35	17200
BA0-38	C80ZRB		11,80	1,94	1,35	17840
BA0-23	C100ZRRB		14,64 BEAM 1 BEAM 2	2,03	2,95	33600 17500 16100
LB0-07	Base counterweight		4,50	0,51	0,90	5000
LB0-06	Base counterweight		5,80	0,40	1,50	8000
LB0-23	Base counterweight		8,30	0,70	0,70	10000
LB0-08	Base support block		2,00	0,50	2,00	5000
BAN-05	Levellers (C45R/C60R/C80R)		1,20	1,20	0,65	250 (x4)
BAN-07	Levellers (C100ZRRB)		1,70	1,70	1,02	734 (x4)

TRAVELLING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BAB-06	Bogies translation D4MR45		2,94	1,25	0,97	3102 (x4)
BAE-05	Electric cable reel D70 (50/100m)					
BAE-06	Electric cable reel D90 (50/100m)					
-	Rail		L1= 0,14 L2= 0,07		0,16	54Kg/mt


EXTERNAL CLIMBING STC 7532 16T / 20T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTE-08	Climbing cage Type S23 Full Steel frame		11,60	3,20	3,30	13500 9550
JEH-07	External hydraulic system S23					
JMA-08	External climbing tie (S23)		3,52	3,49	0,42	3900
JTE-07	Climbing cage Type Y20 Full Steel frame		9,80	2,90	2,90	8500 6000
JEH-06	External hydraulic system Y20					
JMA-06	External climbing tie (Y20)		3,52	3,49	0,42	1890
JTL-13	Adaption section S23/Y		2,30	2,34	0,76	4100
JTT-09	Climbing tower section Type Y (S20)		4,15	1,95	1,95	3020
JTT-10	Climbing tower section Type YR (S20R)		10,30	1,95	1,95	7065



9 x 40' HC - HUH 36 m







x 8 - HUH 36 m






EXTERNAL CLIMBING STC 7532 16T

JTEE-21	Jacking cage OP20		10,80	4,10	4,50	9800
JEHE-32	External hydraulic system type OP20					1950
JMAE-29	Ext. climbing tie OP20		2,70	2,70	0,30	1140
JTLE-42	Climbing link OM20		2,30	2,00	2,85	2225
JVGE-08	Beam 4,80m		4,80	0,30	0,30	960

INTERNAL LADDER CLIMBING STC 7532 20T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
JTI-05	Internal climbing S23 Type A		6,00	2,27	2,29	4854
JTI-06	Internal climbing S23 Type B		6,00	2,27	2,29	4850
JEH-11	Internal H. System S23					3081
JMA-12	Internal climbing tie S23		3,20	2,80	0,60	4720
JTI-24	Internal climbing S20 'Y' H20		7,90	2,00	2,00	10530
			4,00	3,24	0,82	3100

INTERNAL LADDER CLIMBING STC 7532 16T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
JTI-25	OP20-TI-B Internal climbing tower section B		5,21	2,05	2,00	3800
JTI-26	OP20-TI-A Internal climbing tower section A		6,00	2,00	2,00	11500
JTIE-42	Internal ladder		7,50	2,00	2,00	8300
JMAE-30	Frame ladder		2,50	2,50	0,30	3200 (x2)

ELECTRICAL HOSE & STEEL WIRE ROPE

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
ZZZM-	+m. extra electrical		1,0			-
ZZZC-10	+m. additional HUH hoisting wire Ø20		1,0			-

ACCESORIES

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(kg)
AGT-93	Remote with screen					
AGT-95	Extra heating					
AGT-108	150 Amp slip-ring					
AGT-164	Automatic greasing device					
AGT-199	Zonning system					
AGT-23	Anticolision system					
AGT-162	HVAC system 50° 75CV					
AGT-26	Winter kit -1°					
**	Corporate paint / Branding					
AGT-171	De Luxe cabin					
AGT-17	Push button control 1.5m					
AGT-39	Derrick auxiliar with motor					
AGT-38	Auxiliary derrick w/o motor					
AGT-31	Air conditioner 60Hz					
AGT-191	Air conditioner 50Hz					
AGT-28	Winter kit -20°					

ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO / Specifications subject to modification without prior notice / Änderungen der spezifikationen ohne vorankündigung vorbehalten/ Specifications susceptibles de modification sans avis préalable / Specifiche suscettibili di variazioni senza preavviso.