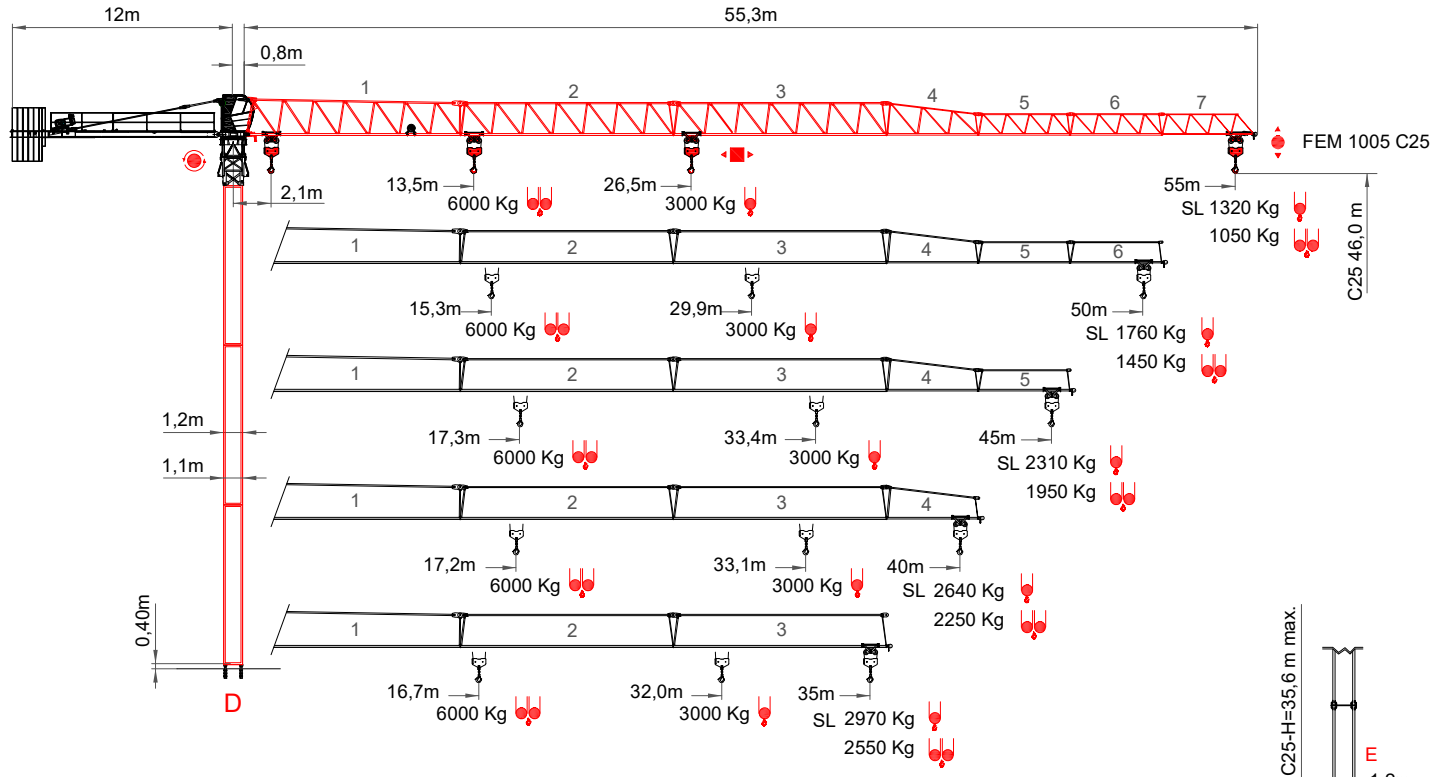
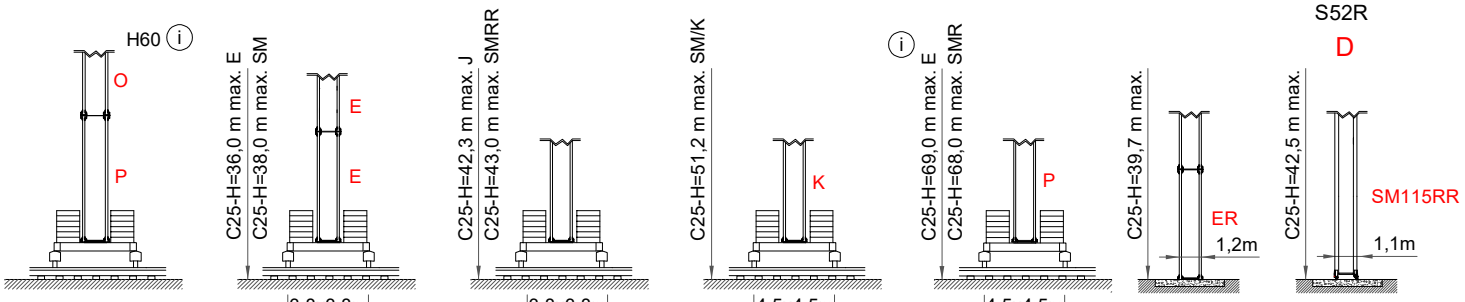
SÁEZ cranes

STC 5513 6T



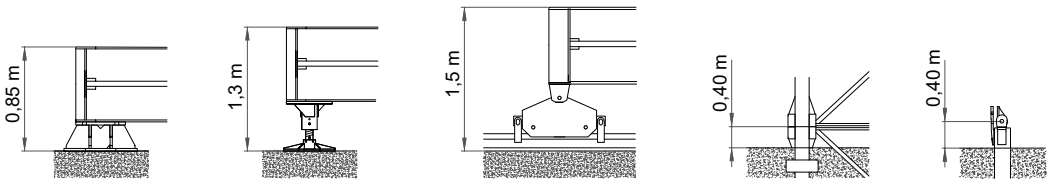
S52R

D



D D F

A-B-C A-B-C A-B-C A-B-C



A B C D F

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу

SAEZ · S-LINK S.D.S. · EKO + POWER CONTROL · REMOTE ASSISTANCE · ZONING · ANTICOLLISION · OPERATOR ACCESS

ISO 9001

EN 14439 - FEM 1005 C25 D25

STC 5513 6T
R07_10/26

SÁEZ cranes STC 5513 6T

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - - График грузоподъёмности

55 m

SL	24	25	26	28	28,4	30	33	35	37	39	40	43	45	48	50	52	55	m
	3000	3000	3000	3000	3000	2822	2519	2346	2192	2055	1991	1819	1717	1580	1498	1422	1320	Kg
	24	25	26	26,5	28	30	33	35	37	39	40	43	45	48	50	52	55	m
	3000	3000	3000	3000	2822	2599	2317	2156	2012	1844	1825	1664	1569	1442	1366	1296	1200	Kg
	15	16	18	21	24,4	28	30	33	35	38	40	43	45	48	50	52	55	m
	3000	3000	3000	3000	3000	2553	2347	2085	1935	1724	1629	1480	1392	1274	1203	1138	1050	Kg
	13,5	15	18	21	24	28	30	33	35	38	40	43	45	48	50	52	55	m
	6000	5317	4309	3600	3074	2553	2347	2085	1935	1724	1629	1480	1392	1274	1203	1138	1050	Kg
SL	14,3	15	18	21	24	27	30	33	35	38	40	43	45	48	50	52	55	m
	6000	5718	4638	3881	3319	2886	2541	2261	2102	1895	1774	1615	1521	1395	1319	1250	1155	Kg

50 m

SL	24	25	26	28	30	32,2	33	35	37	39	40	43	45	48	50	m
	3000	3000	3000	3000	3000	3000	2918	2722	2548	2392	2319	2124	2008	1853	1760	Kg
	24	25	26	28	29,9	30	33	35	37	39	40	43	45	48	50	m
	3000	3000	3000	3000	3000	2993	2674	2492	2330	2185	2119	1937	1830	1686	1600	Kg
	15	18	21	24	28	30	33	35	38	40	43	45	48	50	m	
	3000	3000	3000	3000	3000	2761	2461	2289	2067	1938	1767	1666	1531	1450	Kg	
	15,3	20	21	24	27	30	33	35	38	40	43	45	48	50	m	
	6000	4442	4199	3596	3131	2761	2461	2289	2067	1938	1767	1666	1531	1450	Kg	
SL	15	16,4	21	24	27	30	33	35	38	40	43	45	48	50	m	
	6000	6000	4552	3903	3403	3005	2682	2498	2259	2120	1936	1828	1682	1595	Kg	

45 m

SL	24	25	26	28	30	33	35	36,1	37	38	40	43	45	m
	3000	3000	3000	3000	3000	3000	3000	3000	2916	2826	2660	2440	2310	Kg
	24	25	26	28	30	33,4	35	37	38	39	40	43	45	m
	3000	3000	3000	3000	3000	3000	2841	2660	2577	2498	2423	2220	2100	Kg
	15	18	20	21	24	27	30	31,6	35	37	40	43	45	m
	3000	3000	3000	3000	3000	3000	3000	3000	2656	2483	2258	2064	1950	Kg
	17,3	18	20	21	24	27	30	33	35	37	40	43	45	m
	6000	5740	5094	4819	4135	3609	3190	2850	2656	2483	2258	2064	1950	Kg
SL	15	18,6	20	21	24	27	30	33	35	38	40	43	45	m
	6000	6000	5543	5245	4507	3938	3485	3117	2908	2636	2477	2268	2145	Kg

40 m

SL	24	25	26	28	30	33	35,8	37	38	39	40	m
	3000	3000	3000	3000	3000	3000	3000	2894	2805	2720	2640	Kg
	24	25	26	28	30	33,1	35	37	38	39	40	m
	3000	3000	3000	3000	3000	3000	2814	2634	2552	2474	2400	Kg
	15	18	20	22	24	30	31,5	33	36	38	40	m
	3000	3000	3000	3000	3000	3000	3000	2840	2558	2395	2250	Kg
	15	17,2	18	20	24	27	30	33	36	38	40	m
	6000	6000	5722	5078	4122	3597	3179	2840	2558	2395	2250	Kg
SL	15	18	18,6	20	24	27	30	33	35	38	40	m
	6000	6000	6000	5537	4502	3933	3481	3114	2904	2633	2475	Kg

35 m

SL	24	25	26	28	34,7	35				m
	3000	3000	3000	3000	3000	2970				Kg
	24	25	26	28	32	35				m
	3000	3000	3000	3000	3000	2700				Kg
	15	19	20	21	24	27	30,5	35		m
	3000	3000	3000	3000	3000	3000	3000	2550		Kg
	15	16,7	20	21	24	27	30	35		m
	6000	6000	4905	4639	3979	3470	3066	2550		Kg
SL	15	18	20	21	24	27	30	35		m
	6000	6000	5359	5071	4355	3803	3364	2805		Kg

SL-SUPERLIFT Otras velocidades y características de funcionamiento - Variant speeds and service conditions - Abweichende Geschwindigkeiten und Betriebsbedingungen - Vitesses et conditions de fonctionnement différentes - Differenti velocità e condizioni di funzionamento - Нестандартные скорости и условия эксплуатации

Bloque de contrapeso - Counterweight blocks - Gegengewichtsblöcke - Bloc de contrepoid - Blocco di contrappeso - Плиты противовеса

A = 2300 kg
B = 1400 kg
C = 850 kg

	55 m			50 m			45 m			40 m			35 m		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
	5	2	-	5	1	1	5	-	2	4	1	1	3	2	-
	14300 kg			13750 kg			13200 kg			11450 kg			9700 Kg		

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

40Hp (30kW) - INV - 5V
400V - 50HZ / 60HZ
HUH 200m S/R Ø12

		m/min	0 – 7,5	0 – 44	0 – 55	0 – 64	0 – 74	0 – 86	0 – 3,75	0 – 22	0 – 27,5	0 – 32	0 – 37	0 – 43
	400 m	Kg	3000	3000	2500	2000	1500	1000	6000	6000	5000	4000	3000	2000
		Kw	30	30	30	30	30	30	30	30	30	30	30	30

	m/min	11 - 37 - 75
	kW	4
	r.p.m.	0 - 0,7
	kW	2 x 4
	m/min	12 / 24
	kW	4 x 2,2

* Opcional / Optional / Opzionale
Elevación / Hoisting / Heben / Levage / Sollevamento
Distribución / Trolleying / Katzfahren / Distribution / Ditribuzione
Orientación / Slewing / Schwenken / Orientation / Rotazione
Traslacion / Travelling / Schienenfahren / Translation / Traslazione
Cable / Rope / Seil / Câble / Fune

40Hp (30Kw) - INV

2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 72A Fuse = 80A	TOTAL POWER 42 KVA	GENERATOR 75 KVA	100m 4x25mm2	150m 4x35mm2	200m 4x35mm2
		*480V 60Hz Imax.= 60A Fuse = 70A					

Green power ⓘ
IND. 5.0 ⓘ


ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage

SÁEZ cranes STC 5513 6T

Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни

E = 1,20 M39/M39 8/8
ER = 1,20 M39/M39 16/8
J = S17 10m 1,2/1,7 M39/M45 8/8
K = S17 1,70 M45 8/8
N = S21-S17 8/8
O = S21 8/8
P = S21 16/8
Q = S21 16/16
T = S2322 16/16 M45L
U = S2326 16/16 M52L
X = C2322/21

STC 5513 - E




C25	H (m)	35,6	39,7	42	49,7	61,5	69,3	81	92,8
	M (T·m)	193	223	268	340	570	742,1	1036,8	1424
	T (t)	7	7,9	9,8	10	13,5	16	20,1	25
	P (t)	35,2	37,9	43,2	44	50,2	57,3	70	85,8


ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу


Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни

SM15/E = Ø50/M39
SM15/SM = Ø50/Ø50
SM385 = 8Ø50
SM115 = 8Ø50
SM11 = M39/Ø50
E15/SM = M39/Ø50
J = S17 10m 1,20/1,70 M39/M45 8/8
K = S17 1,70 M45 8/8
L = S17 1,70 M45 16/8
M = S17 1,70 M45 16/16
N = S21-S17 8/8
O = S21 8/8
P = S21 16/8



STC 5513 - E/SM

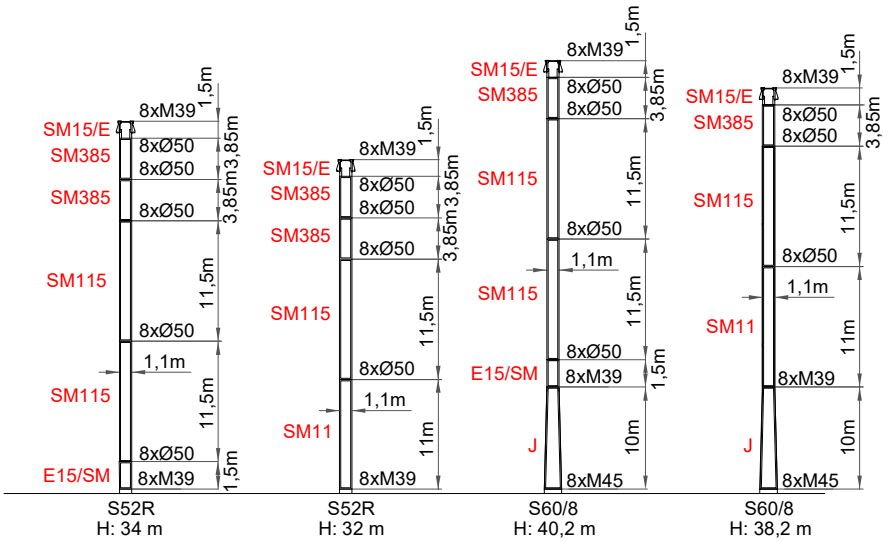

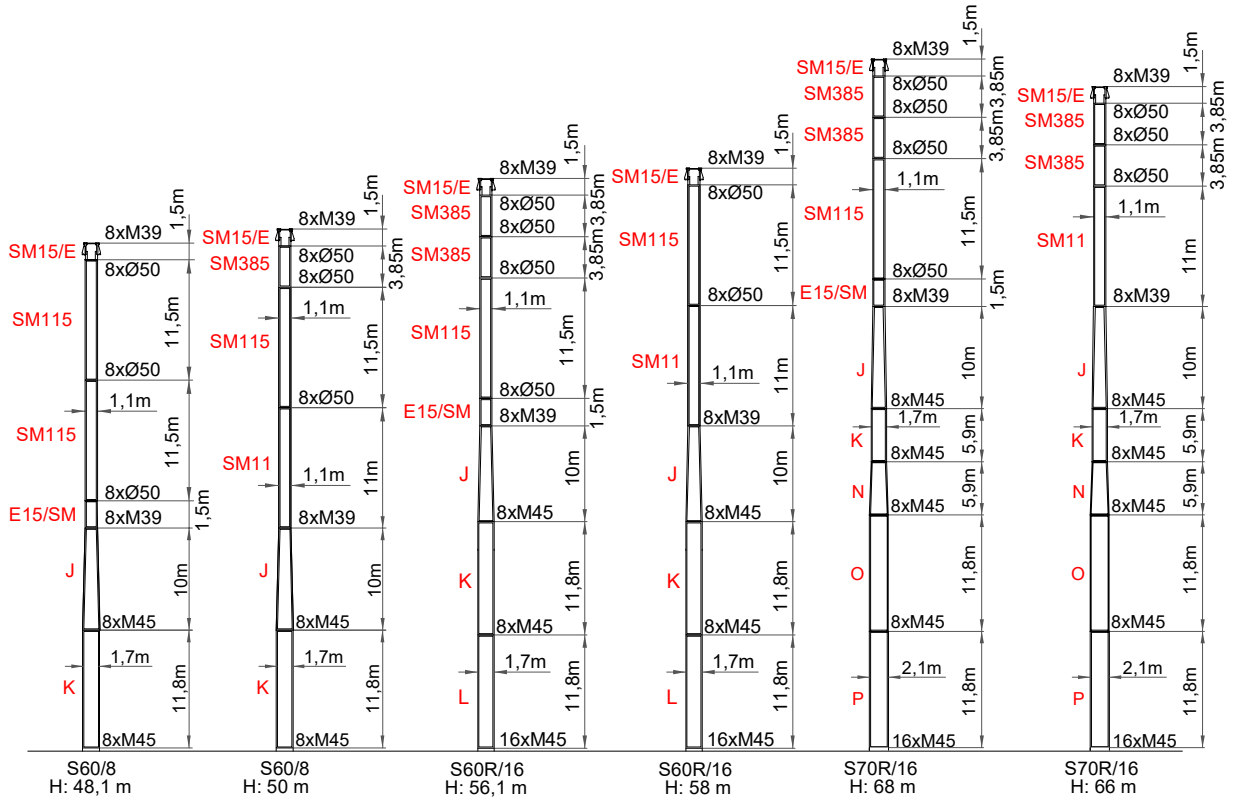


C25	H (m)	34/32	40,2/38,2	50/48,1	58/56,1	68/66
	M (T·m)	212,3	275,7	433,6	582	766,6
	T (t)	5,9	10,5	12,6	14,1	16,5
	P (t)	40,4	43,4	47,2	50,4	57,7


ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage -
Другие высоты подъема и наращивание крана по запросу


SÁEZ cranes STC 5513 6T

Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни

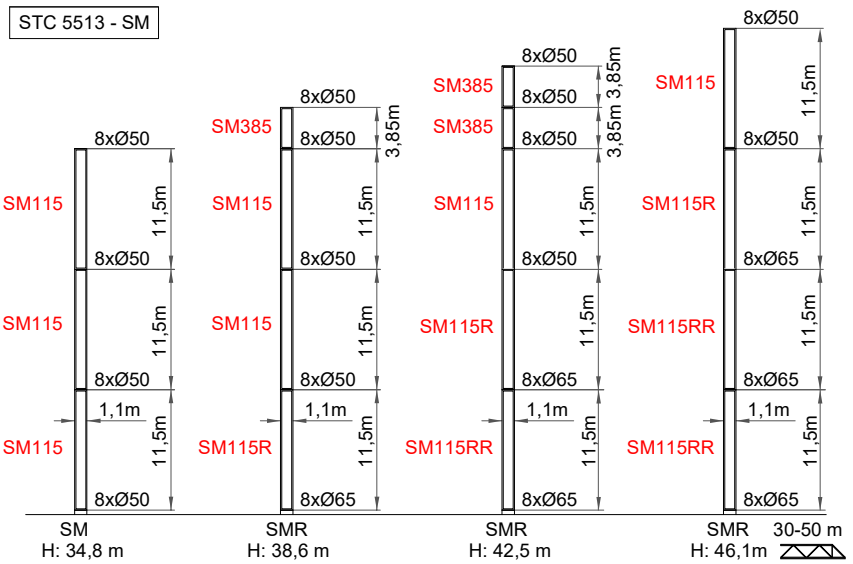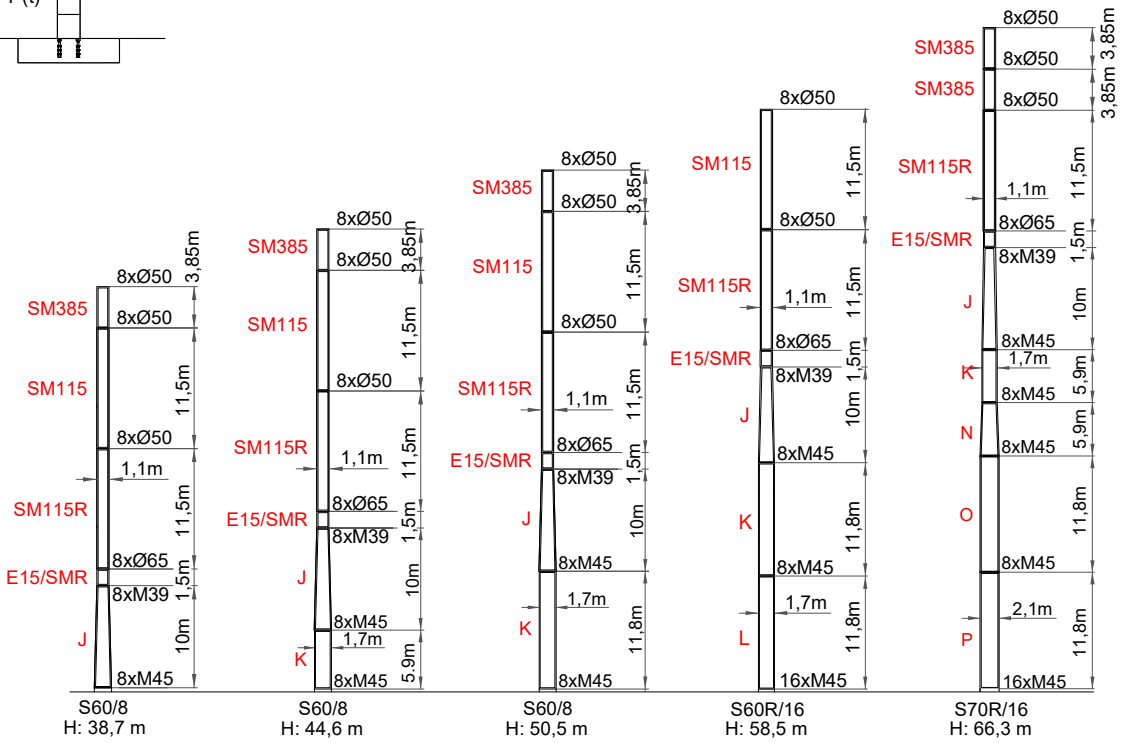SM15/E = Ø50/M39
SM15/SM = Ø50/Ø50
SM385 = 8Ø50
SM115 = 8Ø50
SM115T = 8Ø50
SM115R = 8Ø65/50
SM115RR = 8Ø65/65
SM11 = M39/Ø50
E15/SMRR = M39/Ø65
E15/SM = M39/Ø50
J = S17 10m 1,20/1,70 M39/M45 8/8
K = S17 1,70 M45 8/8
L = S17 1,70 M45 16/8
M = S17 1,70 M45 16/16
N = S21-S17 8/8
O = S21 8/8
P = S21 16/8







30-50 m

C25	H (m)	34,8	38,6	42,5	46,1	38,7 (J)	44,6 (K)	50,5
	M (T·m)	218,8	260,3	312,5	361,1	251,4	337,2	436,2
	T (t)	6	10,4	11,2	120,3	10,2	11,5	12,8
	P (t)	39,8	41,4	42,7	43,3	42,2	44,6	41


C25	H (m)	58,5	66,3					
	M (T·m)	584	734,3					
	T (t)	14,4	16,3					
	P (t)	51,3	56,6					

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу

Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavora alla base - Балласты опорной рамы

K = TORRE S17 1,70 M45 8/8
J = CAMPANA S17 10m 1,20/1,70 M39/M45 8/8
E = TORRE TL 55 1,20 M39/M39 8/8
C38 = 3,8x3,8m 1,2 HB 700
C38-900 = 3,8x3,8m -1,2/1,7 HB 900
C45-700 = 4,5x4,5m -1,2/1,7

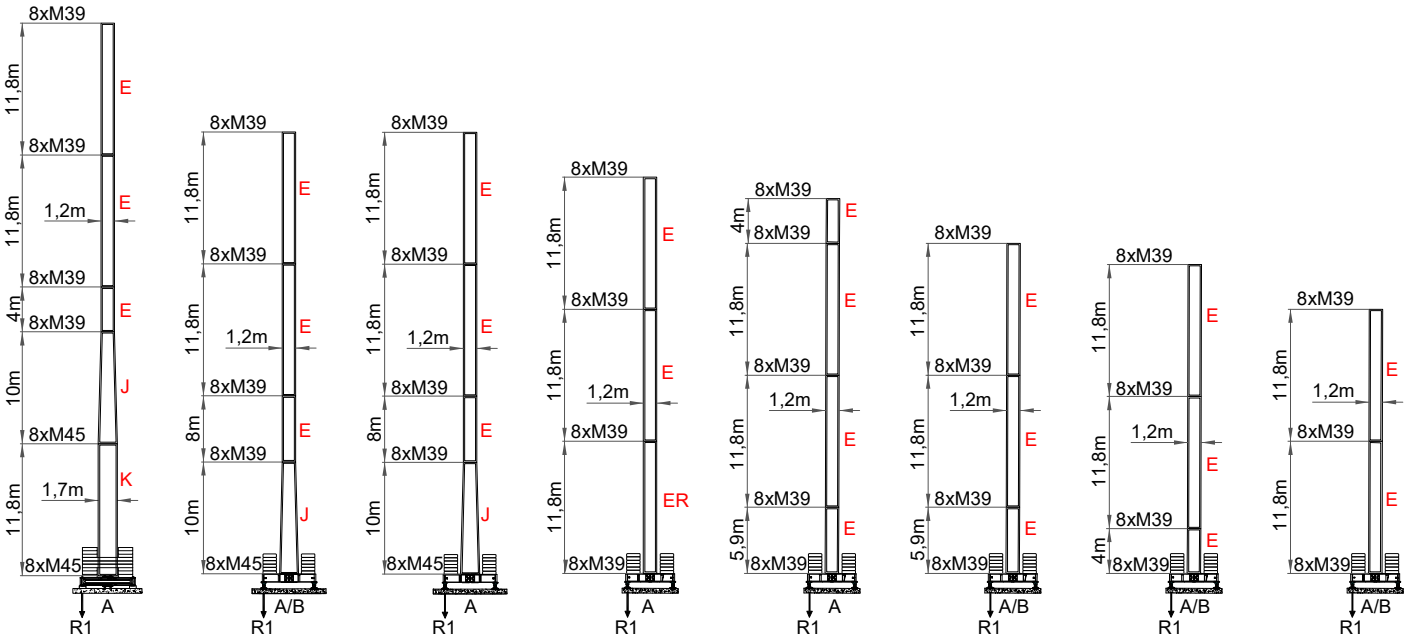STC 5513 - E



C25	H(m): 50,1	H(m): 42,3	H(m): 42,3 SM	H(m): 40,0	H(m): 36,0	H(m): 30,8	H(m): 28,6	H(m): 24,3
	C45-700	C45-700	C38-900 J	C38-900 ER	C38	C38	C38	C38
	LASTRE: 120 Tn	LASTRE: 80 Tn	LASTRE: 110 Tn	LASTRE: 100 Tn	LASTRE: 80 Tn	LASTRE: 70 Tn	LASTRE: 60 Tn	LASTRE: 50 Tn
	R1= 124,5 Tn	R1= 88,2 Tn	R1= 107,7 Tn	R1= 92,2 Tn	R1= 74,5 Tn	R1= 65 Tn	R1= 60,6 Tn	R1= 54,9 Tn

D25	H(m): 44,8	H(m): 38,8	H(m): 36,0		H(m): 30,6	H(m): 30,6	H(m): 28,9	H(m): 24,8
	C45-700	C45-700	C45-700		C38	C38	C38	C38
	LASTRE: 121 Tn	LASTRE: 91,2 Tn	LASTRE: 83,6 Tn		LASTRE: 83,6 Tn	LASTRE: 83,6 Tn	LASTRE: 76 Tn	LASTRE: 60,8 Tn
	R1= 91,5 Tn	R1= 67,5 Tn	R1= 62,9 Tn		R1= 55,6 Tn	R1= 55,6 Tn	R1= 54,7 Tn	R1= 49,3 Tn

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу


SÁEZ cranes STC 5513 6T

Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavora alla base - Балласты опорной рамы

SM15/E = Ø50/M39
SM15/SM = Ø50/Ø50
SM385 = 8Ø50
SM115 = 8Ø50
SM115T = 8Ø50
SM115R = 8Ø65/50
SM115RR = 8Ø65/65
SM11 = M39/Ø50
E15/SMRR = M39/Ø65
E15/SM = M39/Ø50

E = 1,20 M39/M39 8/8
J = S17 10m 1,20/1,70 M39/M45 8/8
K = S17 1,70 M45 8/8
L = S17 1,70 M45 16/8
M = S17 1,70 M45 16/16
N = S21-S17 8/8
O = S21 8/8
P = S21 16/8
C38 = 3,8x3,8m 1,2
C45-700 = 4,5x4,5m -1,2/1,7

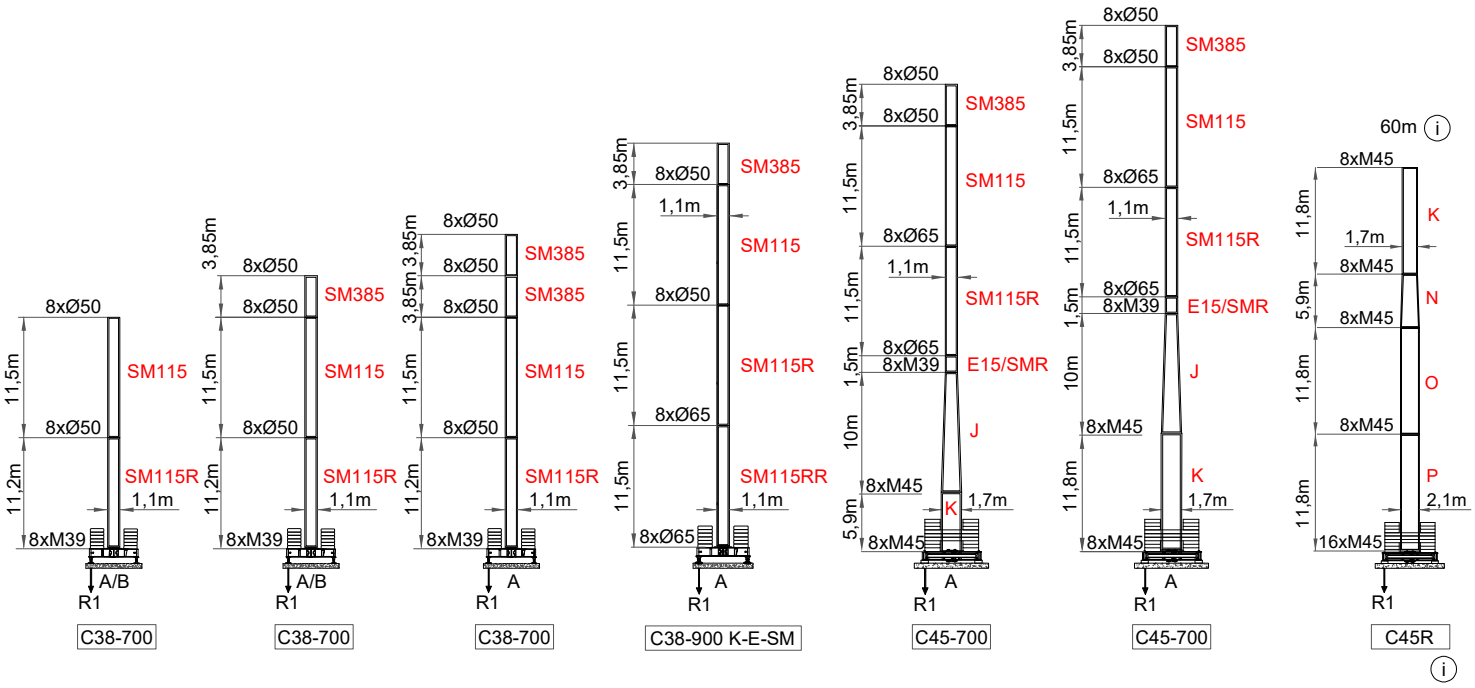STC 5513 - SM




C25							
	H(m): 23,7 SMR	H(m): 27,5 SMR	H(m): 31,4 SMR	H(m): 36,0 SMR	H(m): 42,5 K-E-SM	H(m): 50,0	H(m): 51,2
	C38-700	C38-700	C38-700	C38-700	C38-900	C45-700	C45-700
	LASTRE: 50 Tn	LASTRE: 60 Tn	LASTRE: 70 Tn	LASTRE: 80 Tn	LASTRE: 110 Tn	LASTRE: 110 Tn	LASTRE: 130 Tn
	R1= 57,6 Tn	R1= 64,3Tn	R1= 74,3 Tn	R1= 74,8 Tn	R1= 98,2 Tn	R1= 110,2 Tn	R1= 132,3 Tn

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу


Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

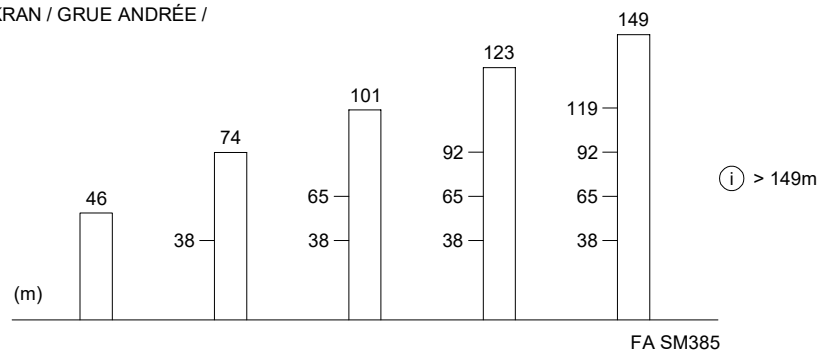SM385 - TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN / GRUE ANDRÉE / GRU ANCORATA




SM385 - TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERKRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES / GRU CLIMBING

FLOOR OPENING



	A (m)	B (m)	
SM385	1,5	1,4	i

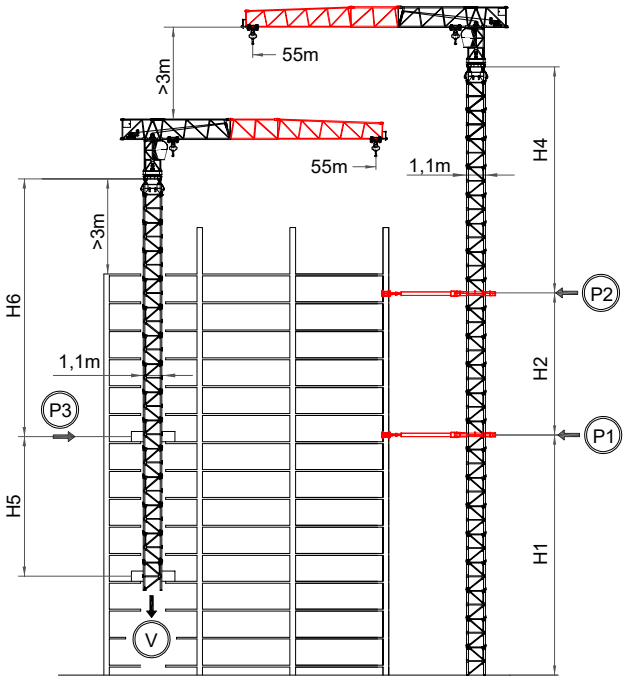

SM385 - DIMENSIONES Y REACCIONES / DIMENSIONS AND FORCES / ABMESSUNGEN UND REAKTIONEN / DIMENSIONS ET RÉACTIONS / DIMENSIONI E REAZIONI

SM385		IN SERVICE*	OUT OF SERVICE*
H	m	t	t
H1	≤ 41,8		
H2	≤ 27		
H4	≤ 34,6		
H5	≤ 16,8		
H6	≤ 23		
P1	55 m		
P2			
P3			
P4			
V	45,2t	45,2t	









*To confirm in each climbing project.

i Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage












SÁEZ cranes STC 5513 6T

Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transporte - dimensioni e trasporti - Размеры и транспорта

UPPER PART STC 5513 6T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
G55E-001	Counterjib		11,49	0,32	1,29	2292
	Jib Trolley		0,96	1,10	0,62	184
	Hoist Block		0,75	0,12	1,40	164
	Jib 1		11,74	1,00	1,85	2400
	Jib 2		11,80	1,00	1,80	1675
	Jib 3		11,80	1,00	1,80	1063
	Jib end		1,00	0,65	0,38	50
	Slewing unit		3,14	1,80	1,70	3198
	Trolley winch 4 kW		1,10	0,58	0,65	260
EQEE5512-001 Electrical Panel Excl.	Hoist winch 40HP (30kW) INV Ø12		1,70	1,80	1,00	1280
AGT-222	Electrical Panel 18/30		2,30	1,60	1,80	770
AGT-235 AGT-209 AGT-171	Cabin EKO Cabin STANDARD Cabin DELUXE		2,60	1,45	2,11	1015
AGT-12	Cabin support		2,60	1,51	1,70	400
AGT-195	Slewing balcony		2,30	0,82	1,23	100







UPPER PART STC 5513 6T

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
	Jib 40m					5538 Kg
	Jib 45m					5851 Kg
	Jib 50m					6111 Kg
P55E-001	Jib 55m					6386 Kg
	Jib 4		5,00	1,00	1,80	400
	Jib 5		5,00	1,00	1,30	313
	Jib 6		5,00	1,00	1,19	260
	Jib 7		5,00	1,00	1,19	275
LA0-01	Counterweight blocks		2,94	0,30	1,25	2300
LA0-02	Counterweight blocks		2,94	0,18	1,25	1400
LA0-03	Counterweight blocks		1,70	0,18	1,25	850













FOUNDATION ANCHOR

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TEME-30	SM Ø50		1,23	1,23	1,66	574
TEM-02	S52R M39		1,20	1,38	1,42	594
TEM-44	S52RR M39		1,20	1,38	1,42	670
TEME-75	SM115R Ø65		1,23	1,23	1,66	638









FOUNDATION ANCHOR

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TEM-03	S60/8 M45		1,85	1,85	1,60	956
TEM-04	S60R/16 M45		1,85	1,85	1,60	1108
TEM-05	S70/8 M45		2,27	2,27	1,60	1122
TEM-06	S70R/16 M45		2,27	2,27	1,60	1274
TEM-12	S52R M39		0,30	0,30	1,42	148,5 (x4)
TEM-59	S52RR M39		0,30	0,30	1,42	167,5 (x4)
TEME-77	SMR Ø65		0,30	0,30	1,42	148,5 (x4)
TEM-13	S60/8 - S70/8 M45		0,35	0,35	1,60	280 (x4)
TEM-14	S60R/16 - S70R/16 M45		0,35	0,35	1,60	320 (x4)
TEM-07	S75R/16/22 M45		0,54	0,54	2,00	350 (x4)
TEM-08	S75R/16/26 M52		0,54	0,54	2,40	525 (x4)
TEM-10	S75R/24/30 M52		0,54	0,54	3,00	900 (x4)
TEM-22	S75R/32/30 M52		0,54	0,54	3,00	925 (x4)
TEM-23	DIMA Type K / L / O		2,31	2,34	0,80	1650
TEME-78	DIMA Type SM115RR Fixing frame		1,10	1,10	0,50	250







TOWER SECTION

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTTE-01	Climbing tower Type SM385 8Ø50/Ø50		4,09	1,17	1,22	1280
TTME-189	Type SM115 11,50M 8Ø50/Ø50		11,74	1,17	1,17	3248
TTME-192	Type SM115R 11,50M 8Ø65/Ø50		11,74	1,17	1,17	4000
TTME-227	Type SM115RR 11,50M 8Ø65/Ø65		11,74	1,17	1,17	4260
JTTE-22	Type SM115T Ø50 Climbing		11,50	1,10	1,10	3400
TTME-223	Type SM75R Ø50/Ø65		7,50	1,10	1,10	2200
JTTE-23	Type SM1,5R Ø50/Ø65		1,50	1,10	1,10	875
JTL-02	Climbing connection frame SM11-1,2/1,09 M39/Ø50		11,20	1,38	1,21	3695
TTM-09 TTM-10 TTM-11 TTM-12	Type E (S12)		11,80 8,00 5,90 4,00	1,20 1,20 1,20 1,20	1,38 1,38 1,38 1,38	3782 2654 2090 1527
TTM-111 TTM-330 TTM-331	Type ER (S12)		11,80 5,90 4,00	1,38 1,38 1,38	1,38 1,38 1,38	4295 2250 1175
TTM-13	Type J (S12/S17)		10,00			3520
TTM-14 TTM-15 TTM-16	Type K (S17)		11,80 5,90 2,95	1,85 1,85 1,85	1,85 1,85 1,85	4620 2505 1500
TTM-17	Type L (S17)		11,80	1,85	1,85	5325
TTM-18	Type M (S17)		11,80	1,85	1,85	5670

TOWER SECTION

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TTM-19	Type N (S17/S21)		5,90			2850
TTM-20 TTM-21 TTM-22	Type O (S21)		11,80 5,90 2,95	2,27 2,27 2,27	2,27 2,27 2,27	4980 2680 1580
TTM-23	Type P (S21)		11,80	2,27	2,27	5880
TTM-24	Type Q (S21)		11,80	2,27	2,27	5900
TTM-268	E15/SMRR M39/Ø65		1,50	1,20	1,20	750
TTM-25	Type X (S21/S23)		5,90	2,27	2,29	4830
TTM-37 TTM-29 TTM-28	Type T (S23)		11,80 6,00 3,00	2,27 2,27 2,27	2,29 2,29 2,29	9000 4780 2750
TTM-38 TTM-31 TTM-30	Type U (S23)		11,80 6,00 3,00	2,31 2,31 2,31	2,34 2,34 2,34	11180 6200 3200




CROSSBASES

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BA0-14	C38-700		5,75	1,47	0,77	3670
BA0-15	C38-900		5,75	1,47	0,97	5550
BA0-36	C38-900 SMR		5,75	1,47	0,97	5550
BA0-03	C45-700		6,70	1,30	0,77	6190
BA0-09	C45R-P		6,90	1,94	1,14	9000
LB0-07	Base counterweight		4,50	0,51	0,90	5000
LB0-08	Base support block		2,00	0,50	2,00	5000
BAN-01	Levellers (C38/C45)		1,20	1,20	0,65	290 (x4)
BAN-04	Pyramids (C38/C45)		0,50	0,50	0,40	80 (x4)









TRAVELLING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BAB-02	Bogies translation S2MR35		1,15	0,25	0,45	1700
BAE-08	Electric cable reel D50 (50/100m)					
-	Rail		L1= 0,14 L2= 0,07		0,16	54Kg/mt

INTERNAL CLIMBING SM115

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JMA-10	Internal Climbing Ties (3x) + Clou		2,04	2,38	0,45	1503 (1x)
JEH-09	Internal Hydraulic System SM110					1100
JTIE-41	Set 16,8M	SM115T+SM1,5R+SM385+ JMA-10+JEH-09 H=42,8m	16,80	1,10	1,10	6305
JTTE-23	Type SM1,5R Ø65/Ø65		1,50	1,10	1,10	875

EXTERNAL CLIMBING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTE-01	Climbing cage Type SM110		8,10	1,70	1,92	2425
JEH-01	External Hydraulic System SM110					1425
JMA-01	External climbing tie Type SM110		1,70	1,70	0,26	720
JTL-01	SM15/E 1,09/1,2 Ø50/M39 Climbing cage connection frame		1,50	1,65	1,65	975
JTL-39	SM15/SM Ø50/Ø50 Climbing cage connection frame		1,50	1,65	1,65	975
JTL-08	E15/SM 1,20/1,09 Ø50 Climbing connection frame		1,50	1,38	1,21	875
JTL-02	Climbing connection frame SM11-1,2/1,09		11,20	1,38	1,21	3695
JTTE-01	Climbing tower Type SM385		4,09	1,17	1,22	1280
JTTE-22	Type SM115T		11,50	1,10	1,10	3685

ELECTRICAL HOSE & STEEL WIRE ROPE

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
ZZZM-03	+m. extra electrical		1,0			
ZZZC-03 (II Falls) ZZZC-04 (IV Falls)	+m. additional HUH hoisting wire Ø12		1,0			

ACCESORIES


CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
AGT-93	Remote with screen					
AGT-95	Extra heating					
AGT-116	80 Amp slip-ring					
AGT-164	Automatic greasing device					
AGT-198	Zonning system					
AGT-23	Anticolision system GD					
ⓘ	Corporate paint					
AGT-17	Push button control 1,5m					
AGT-39	Auxiliary derrick with motor					
AGT-38	Auxiliary derrick w/o motor					
AGT-31	Air conditioner 60Hz					
AGT-191	Air conditioner 50Hz					
AGT-28	Winter kit -20°					

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage

2 x 40' HC - HUH 24 m E-SM
3 x 40' HC - HUH 49,9 m Fixing SM
4 x 40' HC - HUH 35,6 m Fixing E



x 2 - HUH 24 m E-SM
x 3 - HUH 49,9 m Fixing SM
x 3 - HUH 36 m Fixing E



ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO / Specifications subject to modification without prior notice / Änderungen der spezifikationen ohne vorankündigung vorbehalten/ Specifications susceptibles de modification sans avis préalable / Specifiche suscettibili di variazioni senza preavviso.