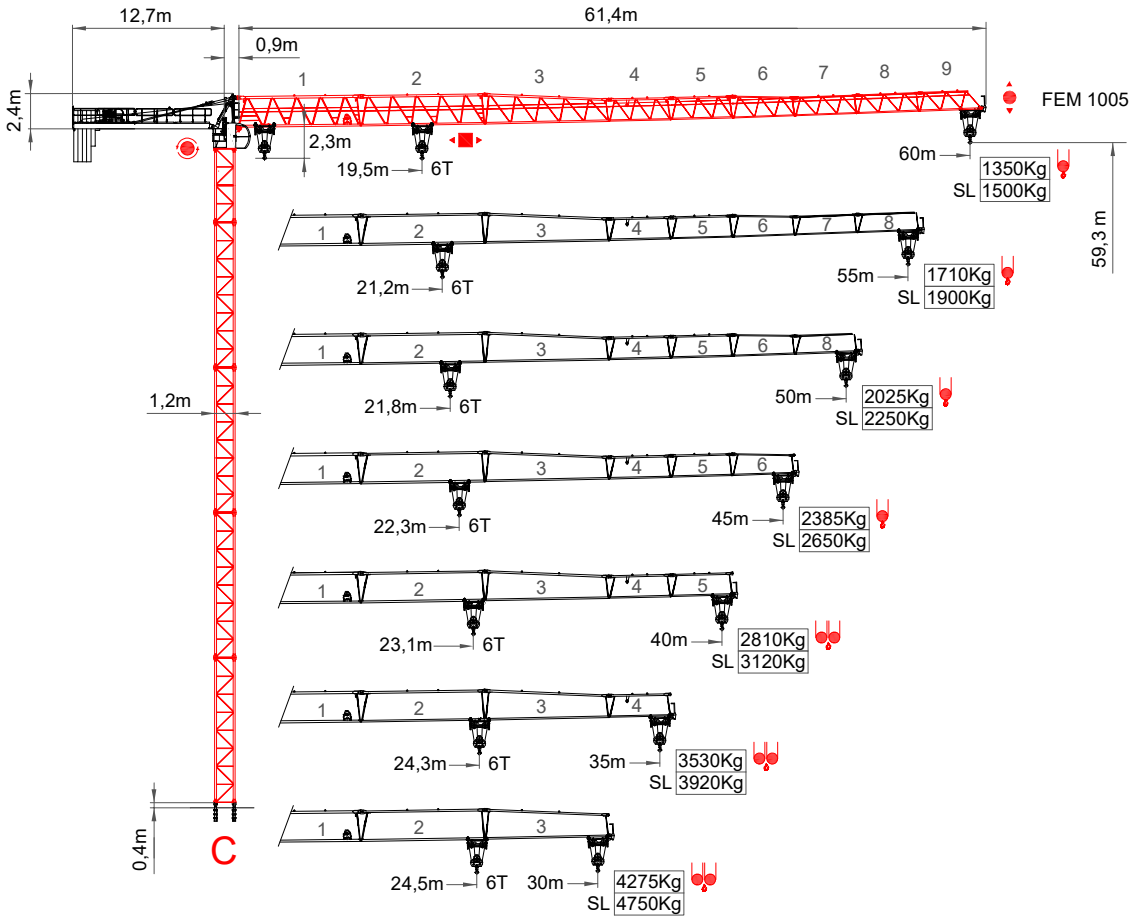
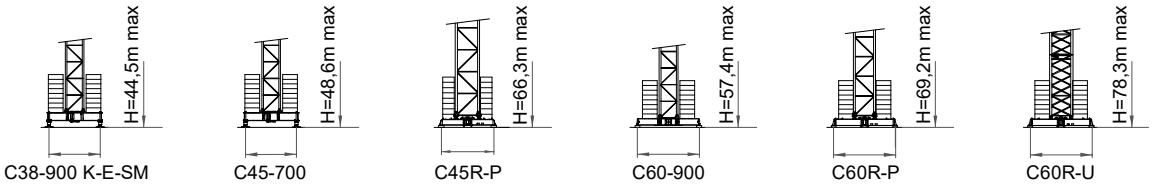

SÁEZ cranes

STC 6015 6T







ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage

SAEZ · S-LINK S.D.S. · EKO + POWER CONTROL · REMOTE ASSISTANCE · ZONING · ANTICOLLISION · OPERATOR ACCESS

ISO 9001

EN 14439 - FEM 1005 C25

STC 6015 6T / SR

R07_11/26

SÁEZ cranes STC 6015 6T

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - - График грузоподъёмности

60 m

15,0	20,0	25,0	30,0	35,4	40,0	45,0	50,0	55,0	60,0	m
3000	3000	3000	3000	3000	2581	2219	1930	1695	1500	Kg
15,0	20,0	25,0	33,0	35,0	40,0	45,0	50,0	55,0	60,0	m
3000	3000	3000	3000	2790	2355	2020	1750	1530	1350	Kg
15	20,0	25,0	30,0	32,5	40,0	45,0	50,0	55,0	60,0	m
3000	3000	3000	3000	3000	2290	1950	1685	1465	1280	Kg
15	18,3	25,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0	m
6000	6000	4145	3315	2730	2290	1950	1685	1465	1280	Kg
15	19,5	25,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0	m
6000	6000	4486	3598	2969	2501	2139	1850	1615	1420	Kg

55 m

15,0	20,0	25,0	30,0	35,0	38,8	45,0	50,0	55,0	m
3000	3000	3000	3000	3000	3000	2488	2164	1900	Kg
15,0	20,0	25,0	30,0	36,1	40,0	45,0	50,0	55,0	m
3000	3000	3000	3000	3000	2630	2255	1955	1710	Kg
15,0	20,0	25,0	30,0	34,7	40,0	45,0	50,0	55,0	m
3000	3000	3000	3000	3000	2505	2150	1870	1640	Kg
15,0	19,7	25,0	30,0	35,0	40,0	45,0	50,0	55,0	m
6000	6000	4540	3645	3010	2535	2170	1880	1640	Kg
15,0	21,2	25,0	30,0	35,0	40,0	45,0	50,0	55,0	m
6000	6000	4943	3977	3293	2784	2390	2076	1820	Kg

50 m

15,0	20,0	25,0	30,0	35,0	39,8	45,0	50,0	m
3000	3000	3000	3000	3000	3000	2574	2250	Kg
15,0	20,0	25,0	30,0	36,8	40,0	45,0	50,0	m
3000	3000	3000	3000	3000	2700	2325	2025	Kg
15,0	20,0	25,0	30,0	36,1	40,0	45,0	50,0	m
3000	3000	3000	3000	3000	2630	2255	1955	Kg
15,0	20,3	25,0	30,0	35,0	40,0	45,0	50,0	m
6000	6000	4700	3775	3120	2635	2255	1955	Kg
15,0	23,5	25,0	30,0	35,0	40,0	45,0	50,0	m
6000	6000	5134	4135	3428	2902	2494	2170	Kg

45 m

15,0	20,0	25,0	30,0	35,0	40,7	45,0	m
3000	3000	3000	3000	3000	3000	2650	Kg
15,0	20,0	25,0	30,0	37,5	40,0	45,0	m
3000	3000	3000	3000	3000	2770	2385	Kg
15,0	20,0	25,0	30,0	35,8	40,0	45,0	m
3000	3000	3000	3000	3000	2700	2315	Kg
15,0	20,7	25,0	30,0	35,0	40,0	45,0	m
6000	6000	4805	3865	3195	2700	2315	Kg
15,0	20,0	22,3	30,0	35,0	40,0	45,0	m
6000	6000	6000	4249	3526	2987	2570	Kg

40 m

15,0	20,0	25,0	30,0	35,0	40,0	m
3000	3000	3000	3000	3000	3000	Kg
15,0	20,0	25,0	30,0	35,0	40,0	m
3000	3000	3000	3000	3000	3000	Kg
15,0	20,0	25,0	30,0	38,0	40,0	m
3000	3000	3000	3000	3000	2810	Kg
15,0	21,3	25,0	30,0	35,0	40,0	m
6000	6000	4985	4010	3325	2810	Kg
15,0	20,0	23,1	30,0	35,0	40,0	m
6000	6000	6000	4428	3678	3120	Kg

35 m

15,0	20,0	25,0	30,0	35,0	m
3000	3000	3000	3000	3000	Kg
15,0	20,0	25,0	30,0	35,0	m
3000	3000	3000	3000	3000	Kg
15,0	20,0	25,0	30,0	35,0	m
3000	3000	3000	3000	3000	Kg
15,0	22,40	25,0	30,0	35,0	m
6000	6000	5280	4255	3530	Kg
15,0	20,0	24,3	30,0	35,0	m
6000	6000	6000	4711	3920	Kg

30 m

15,0	20,0	25,0	30,0	m
3000	3000	3000	3000	Kg
15,0	20,0	25,0	30,0	m
3000	3000	3000	3000	Kg
15,0	20,0	25,0	30,0	m
3000	3000	3000	3000	Kg
15,0	22,5	25,0	30,0	m
6000	6000	5300	4275	Kg
15,0	20,0	24,5	30,0	m
6000	6000	6000	4750	Kg

Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - - График грузоподъёмности

60 m

15	16	17,6	20	25	27	30	33	35	38	40	43	45	48	50	52	55	60	m
6000	6000	6000	5190	3950	3554	3140	2755	2580	2292	2160	1941	1840	1667	1580	1486	1370	1200	Kg
15	16	18	18,7	24	27	30	33	35	38	40	43	45	48	50	52	55	60	m
6000	6000	6000	6000	4431	3832	3360	2979	2764	2485	2324	2111	1985	1818	1718	1625	1500	1320	Kg

SL

55 m

15	16	19,9	21	25	27	30	33	35	38	40	43	45	48	50	52	55	m
6000	6000	6000	5634	4580	4149	3660	3235	3020	2705	2540	2304	2180	1990	1890	1784	1650	Kg
15	16	18	21,2	24	27	30	33	35	38	40	43	45	48	50	52	55	m
6000	6000	6000	6000	5187	4497	3955	3517	3269	2948	2762	2518	2373	2180	2065	1959	1815	Kg

SL

50 m

15	21	21,8	25	27	30	33	35	38	40	43	45	48	50	m
6000	6000	6000	5120	4659	4110	3648	3400	3061	2880	2617	2470	2269	2150	Kg
15	18	19	21	23,4	27	30	33	35	38	40	43	45	48	m
6000	6000	6000	6000	6000	5071	4467	3980	3704	3347	3141	2868	2708	2493	Kg

SL

45 m

15	18	20	21	23,1	25	30	33	35	37	40	43	45	m
6000	6000	6000	6000	6000	5450	4380	3900	3630	3388	3080	2808	2650	Kg
15	16	20	21	24,8	27	30	33	35	38	40	43	45	m
6000	6000	6000	6000	6000	5426	4785	4267	3973	3594	3375	3085	2915	Kg

SL

40 m

15	18	20	22	23,5	25	30	33	35	38	40	m
6000	6000	6000	6000	6000	5570	4480	3991	3720	3357	3150	Kg
15	16	20	21	25,3	27	30	33	35	38	40	m
6000	6000	6000	6000	6000	5563	4907	4377	4077	3689	3465	Kg

SL

35 m

15	18	19	21	23,4	25	30	35	m
6000	6000	6000	6000	6000	5550	4463	3700	Kg
15	16	19	21	25,3	27	30	35	m
6000	6000	6000	6000	6000	5553	4898	4070	Kg

SL

30 m

10	15	20	23,6	30	m
6000	6000	6000	6000	4500	Kg
15	16	20	25,5	30	m
6000	6000	6000	6000	4950	Kg

ⓘ SL

25 m

10	15	20	23,2	25	m
6000	6000	6000	6000	5500	Kg
15	16	20	21	25	m
6000	6000	6000	6000	6000	Kg

ⓘ SL

20 m

10	15	17	18	20	m
6000	6000	6000	6000	6000	Kg
15	16	18	21	20	m
6000	6000	6000	6000	6000	Kg

ⓘ SL

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - советоваться

SL-SUPERLIFT Otras velocidades y características de funcionamiento - Variant speeds and service conditions - Abweichende Geschwindigkeiten und Betriebsbedingungen - Vitesses et conditions de fonctionnement différentes - Differenti velocità e condizioni di funzionamento - Нестандартные скорости и условия эксплуатации

SÁEZ cranes STC 6015 6T / SR

Bloque de contrapeso - Counterweight blocks - Gegengewichtsblöcke - Bloc de contrepoid - Blocco di contrappeso - Плиты противовеса

A = 2750 kg
B = 2350 kg
C = 1100 kg

	60 m			55 m			50 m			45 m		
	A	B	C	A	B	C	A	B	C	A	B	C
	7	-	-	6	1	-	5	1	1	5	1	-
	19250 Kg			18850 Kg			17200 Kg			16100 Kg		

	40 m			35 m			30 m		
	A	B	C	A	B	C	A	B	C
	5	-	1	4	1	-	4	-	1
	14850 Kg			13350 Kg			12100 Kg		

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

33Hp (24kW) - INV
400V - 50HZ
HUH D-Max 190m S/R Ø10

		m/min	0 – 8	0 – 35	0 – 56	0 – 100	0 – 4	0 – 17,5	0 – 28	0 – 50
	380 m	Kg	3000	3000	2200	1000	6000	6000	4400	2000
		kW	24	24	24	24	24	24	24	24

40Hp (30kW) - INV - 5V
400V - 50HZ / 60HZ
HUH 200m S/R Ø12

		m/min	0 – 7,5	0 – 48	0 – 55	0 – 65	0 – 104	0 – 3,2	0 – 24,0	0 – 27,5	0 – 32,5	0 – 52,0
	400 m	Kg	3000	3000	2500	1500	1000	6000	6000	5000	3000	2000
		kW	30	30	30	30	30	30	30	30	30	30

STC 6015 6T SR
45Hp (33 kW) INV
400V - 50HZ / 60 HZ
HUH D-Max 180m S/R Ø12

		m/min	0 – 4	0 – 29,5	0 – 62	0 – 83	0 – 100
	400 m	Kg	6000	6000	2400	1750	1000
		kW	33	33	33	33	33

	m/min	11-37-75
	kW	4
	r.p.m.	0 - 0,7
	kW	2 x 4
	m/min	12 / 24
	kW	4 x 2

* Opcional / Optional / Opzionale
Elevación / Hoisting / Heben / Levage / Sollevamento
Distribución / Trolleying / Katzfahren / Distribution / Ditribuzione
Orientación / Slewing / Schwenken / Orientation / Rotazione
Traslacion / Travelling / Schienenfahren / Translation / Traslazione
Cable / Rope / Seil / Câble / Fune

33Hp (24kW) - INV

2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 63A Fuse= 80A	TOTAL POWER 32 KVA	GENERATOR 75 KVA	100m 4x25mm2	150m 4x35mm2	200m 4x35mm2

40Hp (30kW) - INV

2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 63A Fuse= 80A	TOTAL POWER 42 KVA	GENERATOR 75 KVA	100m 4x25mm2	150m 4x35mm2	200m 4x35mm2

STC 6015 6T SR


2000/14/CEE 2005/88/CEE	2006/95 /CEE	400V 50Hz Imax.= 92A Fuse= 125A * 480V 60Hz Imax.= 77A Fuse = 90A	TOTAL POWER 54 KVA	GENERATOR 100 KVA	100m 4x35mm2	150m 4x50mm2	200m 4x50mm2


Green power (i)
IND. 5.0 (i)

(i) Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу

Mástil / Masts / Maste / Mat / Torre / Torre / Комплектация башни

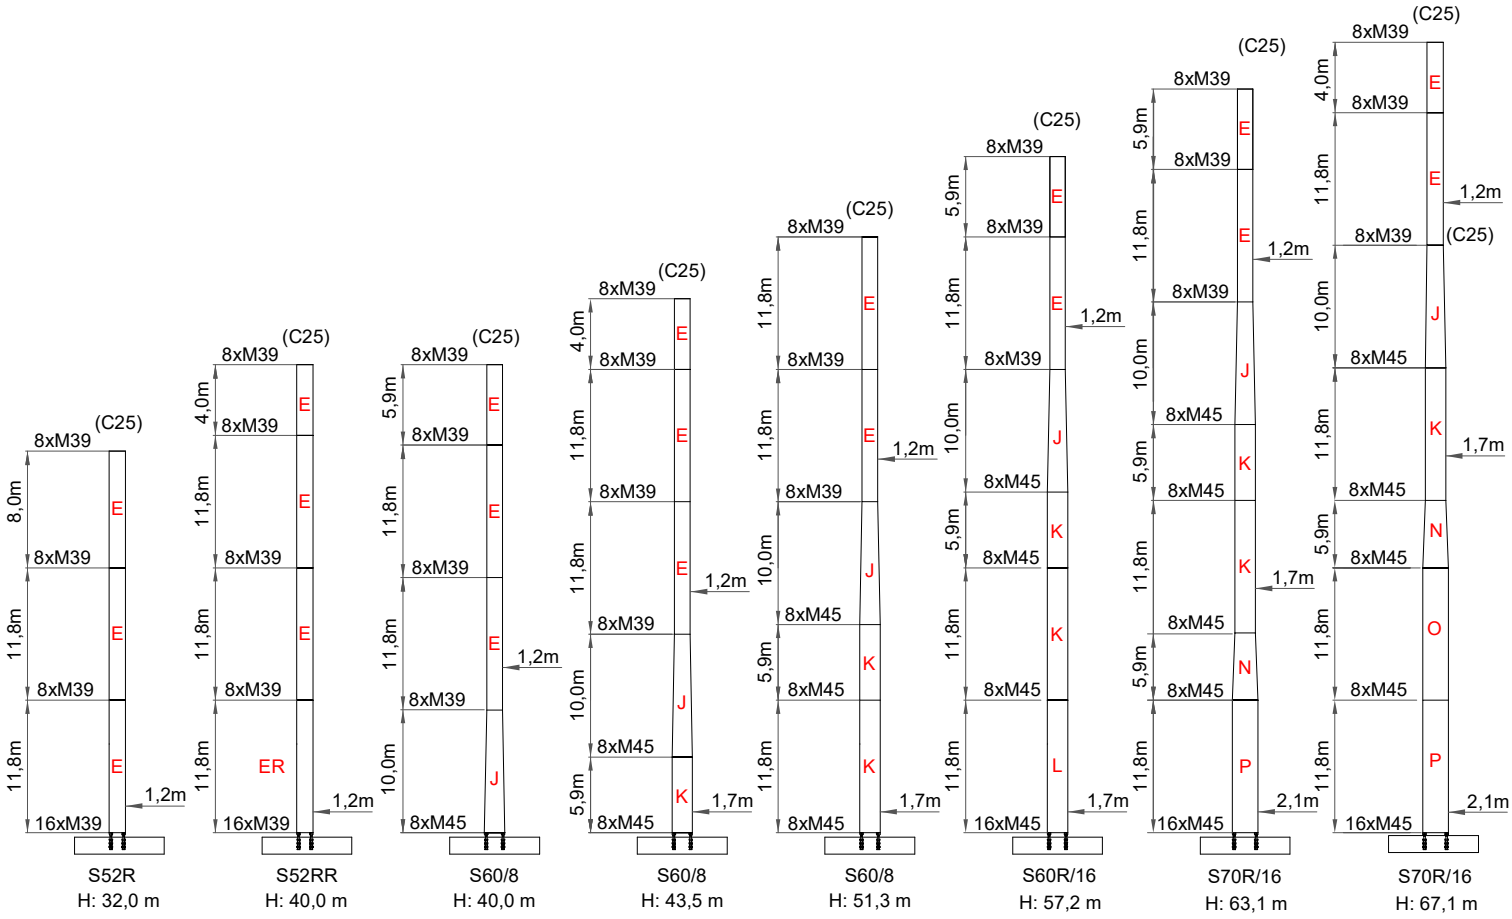
E = 1,20 M39/M39 8/8
ER = 1,20 M39/M39 16/8
J = S12-S17 M39/M45 8/8
K = S17 8/8
L = S17 16/8
M = S17 16/16
N = S21-S17 8/8
O = S21 8/8
P = S21 16/8





SÁEZ cranes STC 6015 6T / SR


Bloque lastre de base - Base ballast block - Grundballastblöcke - Bloc de lest de base - Blocco di zavora alla base - Балласты опорной рамы



C38-900 K-E-SM


					A/B
C25	H (m)	25 m	33 m	41 m	44,5 m
	Z (t)	60 t	80 t	110 t	120 t

H(m)	K5,9	J10	E11,8	E8	E5,9	E4
25	-	-	2	-	-	-
33	-	-	2	1	-	-
41	-	1	2	-	1	-
44,5	1	1	2	-	-	1




C45

							A/B
C25	H (m)	25 m	27,95 m	33,85 m	39,75 m	45,65 m	48,6 m
	R1 (t)	47,45	51,1	62,2	75,1	90,0	98,4
	Z (t)	50 t	50 t	60 t	70 t	90 t	100 t




C45R-P

			A/B			B
C25	H (m)	45,65 m	48,6 m	54,5 m	60,4m	66,3 m
	R1 (t)	88,9	96,6	124,8	157,3	194,2
	Z (t)	80 t	90 t	130 t	170 t	220 t




C60-900

						A/B
C25	H (m)	42,7 m	45,65 m	51,55 m	54,5 m	57,45 m
	R1 (t)	60,6	66,0	82,1	93,0	104,1
	Z (t)	64t	64t	80 t	96 t	112 t



C60R-P

			A/B			B
C25	H (m)	54,5 m	57,45 m	63,35 m	69,25 m	
	R1 (t)	92,0	103,2	128,2	155,9	
	Z (t)	80 t	96 t	128 t	160 t	




C60R-U

						B
C25	H (m)	60,4 m	63,35 m	69,25 m	75,25 m	78,3 m
	R1 (t)	117,8	130,0	156,8	186,9	203,3
	Z (t)	112 t	128 t	160 t	208 t	224 t

Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

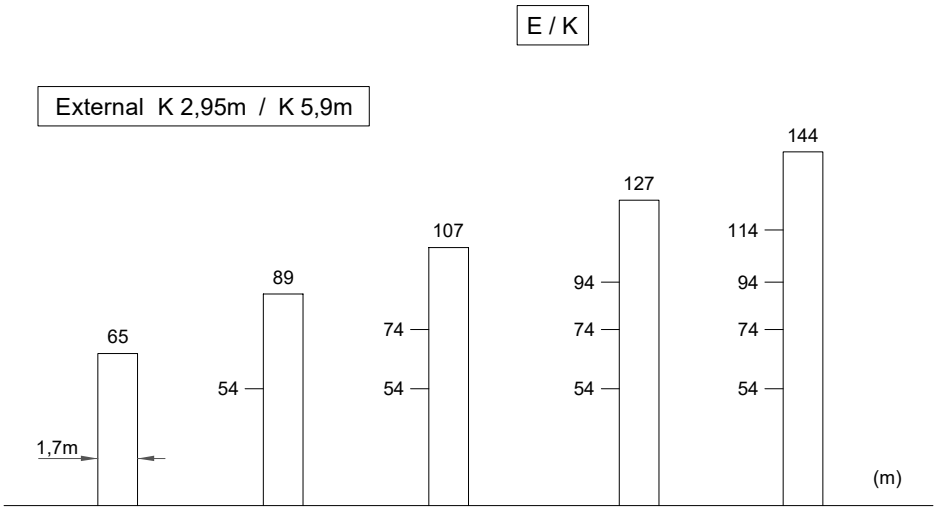TREPADO EXTERNO / EXTERNAL CLIMBING / GEANKERTER KRAN / GRUE ANDRÉE / GRU ANCORATA



P11,8 + O11,8 + N6 + K11,8 + K6 + K3 + KT11,8 +
Cage connection 2,95 + Transfer 1,70/1,20 = 65,7m

KT 2,95/5,9 EXTERNAL			
H	M		
H1	65	IN SERVICE*	OUT OF SERVICE*
H2	20,6		
H4	33,6	t	t
H1+H4	91		
H1+H2+H4	109		

*To confirm in each climbing project.

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу


SÁEZ cranes STC 6015 6T / SR

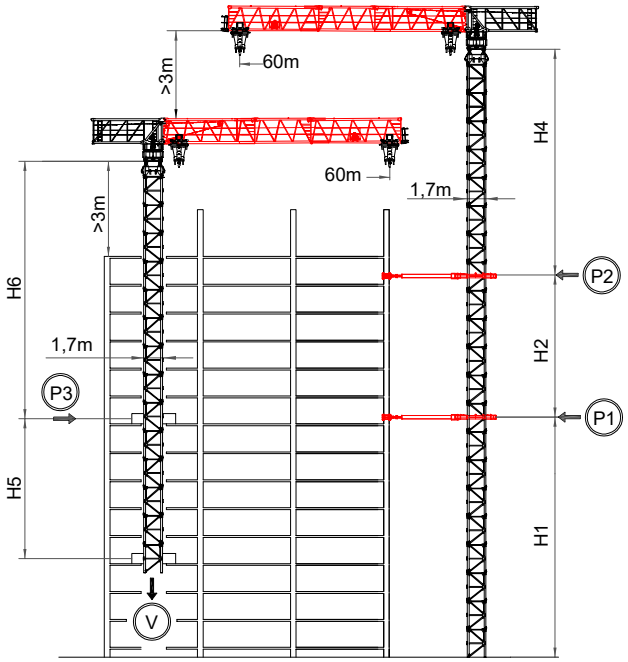
Proceso de trepado - Climbing - Kletterkrane - Telescopable - Sopralzo idraulico - Процесс наращивания крана

TREPADO INTERNO / BOTTOM CLIMBING CRANE / KLETTERKRANE IM GEBÄUDE / TÉLESCOPAGE SUR DALLES / GRU CLIMBING / ВНУТРЕННИЙ ПРОЦЕСС ТЕЛЕСКОПИРОВАНИЯ

E / K

FLOOR OPENING





INTERNAL K6	
H	M
H5	18/14
H6	25
A	2,5
B	2
P3	
V	60 Ton











HI= 43m

*To confirm in each climbing project.

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage - Другие высоты подъема и наращивание крана по запросу








Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transporte - dimensioni e trasporti - Размеры и транспорта

UPPER PART STC 6015 6T / SR







CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
G60E-002	Counterjib Full		11,94	1,25	0,70	4500
	Jib Trolley		1,90	1,91	1,10	310
	Hoist Block		1,10	0,40	1,40	410
	Cabin support		2,50	1,50	2,23	400
	Jib 1		10,20	1,21	2,10	2235
	Jib 2		10,30	1,21	2,09	1510
	Jib 3		10,30	1,21	2,06	1150
	Jib end		0,61	1,45	1,50	95
	Slewing unit		2,50	2,50	2,50	3500
			2,12	1,41	2,14	892
EQE5560-02	Hoist winch 33HP (24Kw) INV Ø10		1,50	1,05	0,81	690
EQEE5512-001	Hoist winch 40HP (30Kw) INV Ø12		1,70	1,80	1,00	1280
EQE652-01 EQE652-02	Hoist winch 45HP (33kW) INV GD 45HP INV GD D-Max		1,38	1,80	1,00	940
AGT-222	Electrical Panel		2,30	1,60	1,80	770
AGT-235 AGT-209 AGT-171	Cabin EKO Cabin STANDARD Cabin DELUXE		2,60	1,45	2,11	1015
AGT-181	Slewing balcony		2,46	1,55	0,73	254

SÁEZ cranes STC 6015 6T / SR



UPPER PART STC 6015 6T / SR

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
P60E-001	Jib 60m					6550 Kg
	Jib 4		5,20	1,21	1,72	505
	Jib 5		5,20	1,21	1,69	435
	Jib 6		5,20	1,21	1,68	375
	Jib 7		5,18	1,21	1,44	340
	Jib 8		5,15	1,21	1,43	320
	Jib 9		5,15	1,21	1,24	285

















AIR COUNTERWEIGHT

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
LM0E-29 Unfilled Air Ballast Frame Kit	Air ballast type A		4,00	0,82	0,35	140
	Air ballast type B		3,40	0,82	0,35	120
	Air ballast type C		1,60	0,82	0,35	90
LM0E-16 Concrete Filled Air Ballast Frame Kit	Air ballast type A		4,00	0,82	0,35	2750
	Air ballast type B		3,40	0,82	0,35	2350
	Air ballast type C		1,60	0,82	0,35	1100










FOUNDATION ANCHOR

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TEM-02	S52R M39	 H L x W	1,20	1,38	1,42	594
TEM-44	S52RR M39	 H L x W	1,20	1,38	1,42	670
TEM-03	S60/8 M45	 H L x W	1,85	1,85	1,60	956
TEM-04	S60R/16 M45	 H L x W	1,85	1,85	1,60	1108
TEM-05	S70/8 M45	 H L x W	2,27	2,27	1,60	1122
TEM-06	S70R/16 M45	 H L x W	2,27	2,27	1,60	1274
TEM-59	S52RR M39	 L x W H	0,30	0,30	1,42	167,5 (x4)
TEM-13	S60/8-S70/8 (1x) M45	 L x W H	0,35	0,35	1,60	280 (x4)
TEM-14	S60R/16-S70R/16 (1x) M45	 L x W H	0,35	0,35	1,60	320 (x4)
TEM-07	S75R/16/22 M45	 L x W H	0,54	0,54	2,00	350 (x4)
TEM-08	S75R/16/26 M52	 L x W H	0,54	0,54	2,40	525 (x4)
TEM-10	S75R/24/30 M52	 L x W H	0,54	0,54	3,00	900 (x4)
TEM-22	S75R/32/30 M52	 L x W H	0,54	0,54	3,00	925 (x4)
TEM-23	DIMA Type K / L / O	 H L x W	2,31	2,34	0,80	1650
TEM-20	DIMA Type T / U / Z	 H L x W	2,60	2,60	1,00	2500


TOWER SECTION

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
TTM-09	Type E (S12)		11,80	1,20	1,38	3782
TTM-10			8,00	1,20	1,38	2654
TTM-11			5,90	1,20	1,38	2090
TTM-12			4,00	1,20	1,38	1527
TTM-111	Type ER 11,8M (S12)		11,80	1,38	1,38	4295
TTM-13	Type J (S12/S17)		10,00			3520
TTM-14	Type K (S17)		11,80	1,85	1,85	4620
TTM-15			5,90	1,85	1,85	2505
TTM-16			2,95	1,85	1,85	1500
TTM-17	Type L (S17)		11,80	1,85	1,85	5325
TTM-19	Type N (S17/S21)		5,90			2850
TTM-20	Type O (S21)		11,80	2,27	2,27	4980
TTM-21			5,90	2,27	2,27	2680
TTM-22			2,95	2,27	2,27	1580
TTM-23	Type P (S21)		11,80	2,27	2,27	5880
TTM-25	Type X (S21/S23)		5,90	2,27	2,29	4960
TTM-37	Type T (S23)		11,80	2,27	2,29	9000
TTM-29			6,00	2,27	2,29	4780
TTM-28			3,00	2,27	2,29	2750
TTM-38	Type U (S23)		11,80	2,31	2,34	11180
TTM-31			6,00	2,31	2,34	6200
TTM-30			3,00	2,31	2,34	3200
TTM-91	Type Z (S23)		11,80	2,36	2,61	15064
TTM-32			6,00	2,36	2,61	7825
TTM-92	Type ZR (S23)		11,80	2,36	2,61	15200
TTM-33			6,00	2,36	2,61	7925
TTM-71	Type ZZR (S23)		11,80	2,36	2,61	15325
TTM-41			6,00	2,36	2,61	8200
TTM-77	Type ZRR (S23)		11,80	2,36	2,61	15530
TTM-42			6,00	2,36	2,61	8405
TTM-112	Type ZRR-R (S23)		11,80	2,36	2,61	18500
TTM-151			6,00	2,36	2,61	10250




CROSSBASES

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BA0-15	C38-900 K-E-SM		5,75	1,47	0,97	5550
BA0-03	C45-700		6,70	1,30	0,77	6190
BA0-09	C45R-P		6,90	1,94	1,14	9000
BA0-05	C60-900		8,66	1,47	0,96	8625
BA0-10	C60R-P		9,01	1,94	1,35	13500
BA0-17	C60R-U		9,01	1,94	1,35	13500
LB0-07	Base counterweight		4,50	0,51	0,90	5000
LB0-06	Base counterweight		5,80	0,40	1,50	8000
LB0-08	Base support block		2,00	0,50	2,00	5000
BAN-01	Levellers (C38/C45)		1,20	1,20	0,65	290 (x4)
BAN-03	Levellers (C60-900)		1,20	1,20	0,65	230 (x4)
BAN-05	Levellers (C45R/C60R)		1,20	1,20	0,65	250 (x4)
BAN-04	Pyramids (C38/C45)		0,50	0,50	0,40	80 (x4)






TRAVELLING

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
BAB-01	Bogies translation S2MR45		1,15	0,25	0,45	1800
BAB-09	Bogies translation S4MR45		1,15	1,25	0,45	1960
BAE-05	Electric cable reel D70 (50/100m)					
BAE-08	Electric cable reel D50 (50/100m)					
-	Rail		L1= 0,14 L2= 0,07		0,16	54Kg/mt

EXTERNAL CLIMBING K

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTE-02	Climbing cage Type K-2,95 Full Steel frame		7,35	2,10	2,10	6400 4890
JTE-03	Type K-5,9 Full Stell frame		11,20	2,10	2,10	8000 6490
JEH-02	External hydraulic system type K					1500
JTT-02 JTT-04 JTT-03	Climbing tower section Type KT (S17)		11,80 5,90 2,95	1,85 1,85 1,85	1,85 1,85 1,85	4750 2572 1548
JMA-02	External climbing tie type K		2,31	2,31	0,26	950
JTL-09	Cage connection section Type K		2,95	2,30	2,30	1590
TTM-76	1,70/1,20 Climbing connection frame		0,60	2,30	2,30	460


INTERNAL CLIMBING K

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
JTIE-11	KT 5,9-A Internal climbing tower section A		5,90	1,85	1,85	3260
JTIE-12	KT 5,9-B Internal climbing tower section B		5,90	1,85	1,85	2950
JMAE-15	Frame ladder		2,30	2,30	0,26	3200 (x3)
JEHE-14	Internal hydraulic system with central Type K					1500
JTTE-04 JTTE-03	Type KT		5,90 2,95	1,85 1,85	1,75 1,75	2572 1548
TTM-76	1,70/1,20 Climbing connection frame		0,60	2,30	2,30	460

6 x 40' HC - HUH 67,0 m Tower E/K
5 x 40' HC - HUH 36,9 m Tower E/K



x 5 - HUH 64,0 m Tower E/K
x 4 - HUH 36,9 m



ELECTRICAL HOSE & STEEL WIRE ROPE

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
ZZZM-02 24kW	+m. extra electrical		1,0			
ZZZM-03 30kW	+m. extra electrical		1,0			
ZZZC-14 (II Falls) ZZZC-15 (IV Falls)	+m. additional HUH hoisting wire Ø10		1,0			
ZZZC-03 (II Falls) ZZZC-04 (IV Falls)	+m. additional HUH hoisting wire Ø12		1,0			

ACCESORIES

CODE	ELEMENT		L(m)	W(m)	H(m)	Weight(Kg)
AGT-93	Remote with screen					
AGT-95	Extra heating					
AGT-108	150 Amp slip-ring					
AGT-164	Automatic greasing device					
AGT-199	Zonning system					
AGT-23	Anticolision system GD					
AGT-162	HVAC system 50° 75CV					
ⓘ	Corporate paint					
AGT-17	Push button control 1,5m					
AGT-39	Auxiliary derrick with motor					
AGT-38	Auxiliary derrick w/o motor					
AGT-31	Air conditioner 60Hz					
AGT-191	Air conditioner 50Hz					
AGT-28	Winter kit -20°					

ⓘ Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage

ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO / Specifications subject to modification without prior notice / Änderungen der spezifikationen ohne vorankündigung vorbehalten/ Specifications susceptibles de modification sans avis préalable / Specifiche suscettibili di variazioni senza preavviso.